


# LUZ-P23 110.830.60/DALI-ST


LUZ | Pendant (1xLED 65W 830/3000K 9710lm 60°)

— C0/C180    cd / 1000 lm    - - - C90/C270

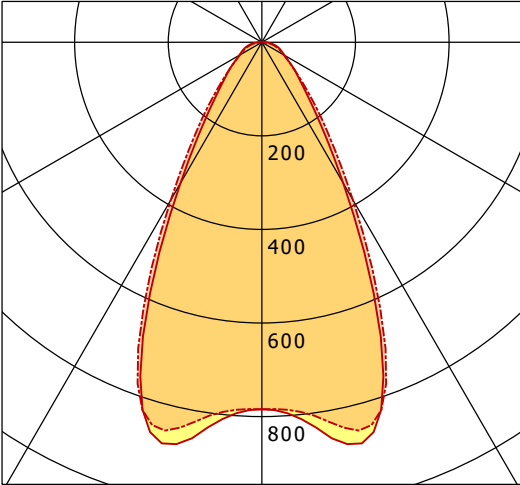

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 784 | 784 | 784  | 784  |
| 15°          | 878 | 856 | 878  | 856  |
| 30°          | 348 | 389 | 348  | 389  |
| 45°          | 115 | 125 | 115  | 125  |
| 60°          | 56  | 54  | 56   | 54   |
| 75°          | 33  | 27  | 33   | 27   |
| 90°          | 7   | 1   | 7    | 1    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

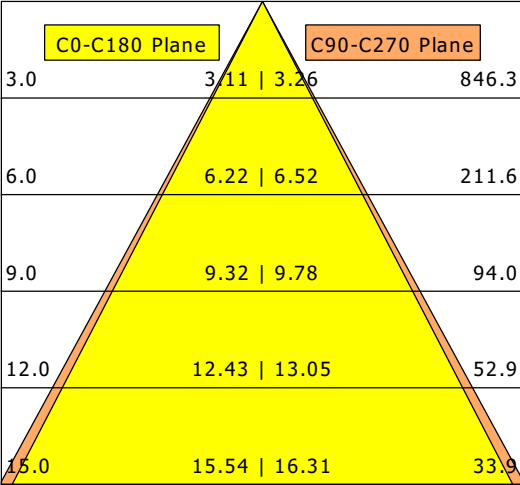

|                    |  |                 |
|--------------------|--|-----------------|
| <b>η</b>           |  | LED             |
| Efficiency         |  | 149 lm/W        |
| Direct/Indirect    |  | ↓ 99% / ↑ 1%    |
| System Power       |  | 65 W            |
| <b>UGR</b>         |  | X=4H, Y=8H      |
| Reflection factors |  | 70/50/20        |
| UGR C0/C180        |  | 22.8            |
| UGR C90/C270       |  | 22.5            |
| CIE Flux Codes     |  | 76 90 97 99 100 |
| Ra/CRI             |  | > 80            |