


JETT-R 103.940.SP/DALI

Jett Evo | Recessed (1xLED 24W 940/4000K 3190lm 16°)

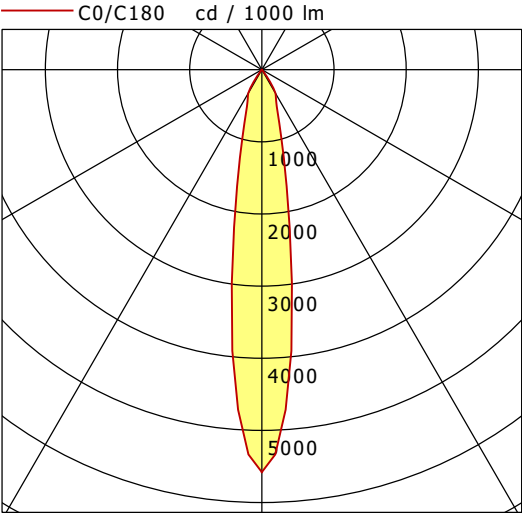

	C0	C90	C180	C270
0°	5579	5579	5579	5579
15°	1104	1104	1104	1104
30°	378	378	378	378
45°	11	11	11	11
60°	7	7	7	7
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.90	1977.3
6.0	1.80	494.3
9.0	2.71	219.7
12.0	3.61	123.6
15.0	4.51	79.1

η		LED
Efficiency		133 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		24 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.9
UGR C90/C270		17.9
CIE Flux Codes	98 100 100 100 100	
Ra/CRI		>90