
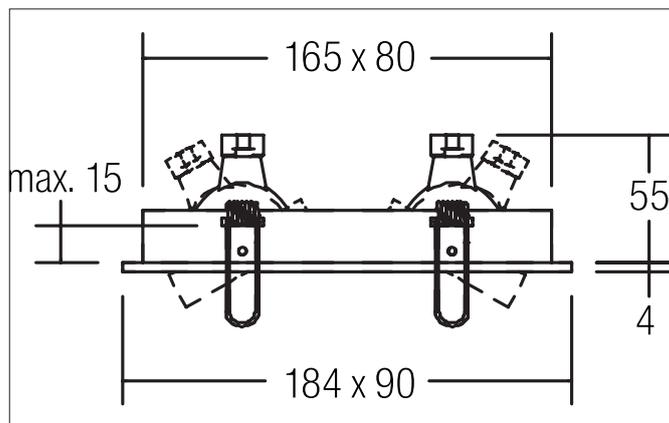



**Recessed spot, GX5,3, 2-x**

Article no. 512812


**Tender**

Recessed spot, GX5,3, 2-x, aluminum matt, Square. In a compact design, for installation in tool-less rapid assembly systems. Lamp holder: GX5.3, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Voltage: 12V, Power: 50 W, Amount of light sources / fittings: 2 pieces, Light colour: white, Adjustability: Pivoted, without control gear, Type of dimming: Depending on driver.

| Article data       |                           |
|--------------------|---------------------------|
| Article no.        | 512812                    |
| GTIN               | 4250047760252             |
| Short description  | Recessed spot, GX5,3, 2-x |
| Material           | Aluminium                 |
| Colour             | aluminum matt             |
| Type of surface    | Matt                      |
| Shape              | Square                    |
| Length             | 180 mm                    |
| Width              | 90 mm                     |
| Built-in length    | 165 mm                    |
| Built-in width     | 80 mm                     |
| Installation depth | 55 mm                     |
| Weight             | 0.33 kg                   |
| D licence plate    | No                        |
| Conformance        | CE, UKCA                  |


**Recessed spot, GX5,3, 2-x**

Article no. 512812

| Operating technology of the luminaire |                        |
|---------------------------------------|------------------------|
| System output                         | 50 W                   |
| Voltage type                          | AC/DC                  |
| AC nominal voltage max                | 12 V                   |
| Frequency max                         | 50 Hz                  |
| Lamp                                  | For LED-retrofill lamp |
| Lamp holder                           | GX5.3                  |
| Protection class                      | III                    |
| Degree of protection                  | IP20                   |
| Control                               | Depending on driver    |
| Bulb change possible                  | Yes                    |
| Energy efficiency class               | not required           |

| Mounting technology   |   |
|-----------------------|---|
| Mounting method       | Recessed mounting                                   |
| Place of installation | Ceiling-mounted                                     |
| Adjustability         | Pivoted   |
| Swivel angle          | 30°   |
| Further references    | No cover with thermal insulation material Smarthome |
| Circlip               | Without circlip                                     |

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 0.426 kg   |
| Length of packaging     | 215 mm   |
| Packaging width         | 80 mm  |
| Packaging height        | 120 mm   |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |