

Panel mounting appliance inlet, angled TN - flange 85x85, fixing centers 70x70



Product description	
BALS-Prd.-Nr	27106
EAN	4024941271066
Product category	TN panel mounting appliance inlet, angled
Current	16A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	2 h
Voltage	> 50V~

Product description	
Frequency	> 300 - 500Hz
VG-type-no.:	VG 96919 BP 004
Protection degree	IP67
Colour code	bronze-green RAL 6031-F9
Colour of appliance	Bayonet ring bronze-green RAL 6031-F9, Collar bronze-green RAL 6031-F9, Closure cap bronze-green RAL 6031-F9, Enclosure bronze-green RAL 6031-F9
Connection design	with screw terminal
Maximum conductor size	2,5 qmm
Cable entry	other
Height	100mm
Width	86.5mm
Depth	91mm
Flange size vertical in mm	85mm
Flange size horizontal in mm	85mm
Drill hole dist. vertical mm	70mm
Drill hole dist. horizontal mm	70mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	The inclination is 10°

Additional technical properties

With closure cap

Logistics data

Weight/pcs	0.28 kg / Piece
------------	-----------------

Packaging	Bag
-----------	-----

Content amount	1 ST
----------------	------

EAN	4024941271066
-----	---------------

Length	91 mm
--------	-------

Width	86.5 mm
-------	---------

Height	100 mm
--------	--------

Weight	0.281 kg
--------	----------

Volume	787.15 ccm
--------	------------

Packaging	Carton
-----------	--------

Content amount	10 ST
----------------	-------

EAN	4024941839372
-----	---------------


Length	295 mm
--------	--------

Width	185 mm
-------	--------

Height	215 mm
--------	--------

Weight	2.964 kg
--------	----------

Volume	9,975 ccm
--------	-----------

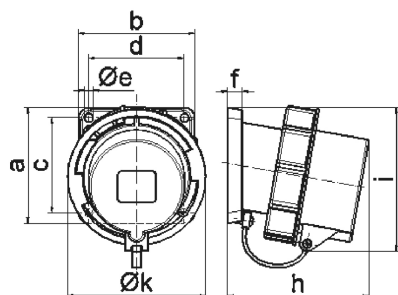

5 MB 31

Ampere Polzahl	16 3	16 4	16 5	32 3	32 4	32 5
a	85,0	85,0	85,0	85,0	85,0	85,0
b	85,0	85,0	85,0	85,0	85,0	85,0
c	70,0	70,0	70,0	70,0	70,0	70,0
d	70,0	70,0	70,0	70,0	70,0	70,0
e ø	6,3	6,3	6,3	6,3	6,3	6,3
f	11,0	11,0	11,0	11,0	11,0	11,0
h	94,0	94,0	94,0	105,0	105,0	105,0
i	94,0	97,0	101,0	103,0	103,0	107,0
k	70,5	78,5	86,5	94,0	94,0	101,5
Leiter mm² min	1,0	1,0	1,0	2,5	2,5	2,5
Leiter mm² max	2,5	2,5	2,5	6,0	6,0	6,0