


ML-P 060.11830.3 OPD/DALI


Monoline 060 | Pendant (1xLED 32W 830/3000K 4780lm)

— C0/C180 cd / 1000 lm - - - C90/C270

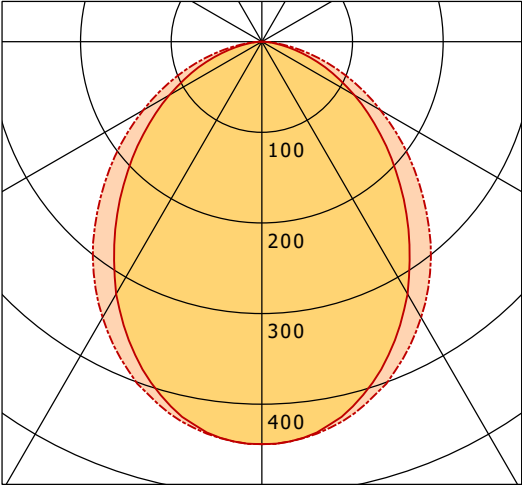

	C0	C90	C180	C270
0°	444	444	444	444
15°	410	419	410	419
30°	322	351	322	351
45°	212	254	212	254
60°	118	151	118	151
75°	42	59	42	59
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

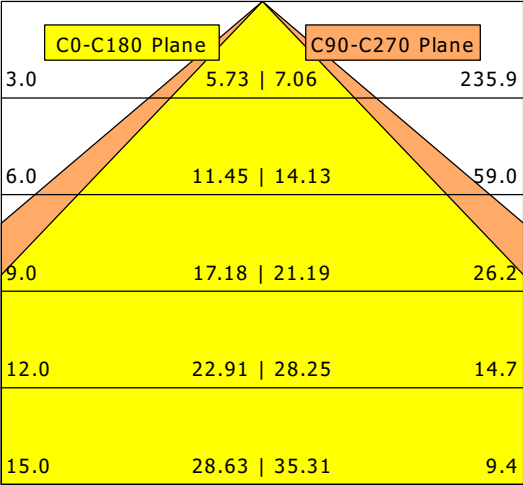

η		LED
Efficiency		149 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		32 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		24.9
UGR C90/C270		26.2
CIE Flux Codes		54 84 97 100 100
Ra/CRI		> 80