



CSA-R 503.930.FL/DALI

CSA 50 Generation 2 (1xLED 27W 930/3000K 3400lm 36°)

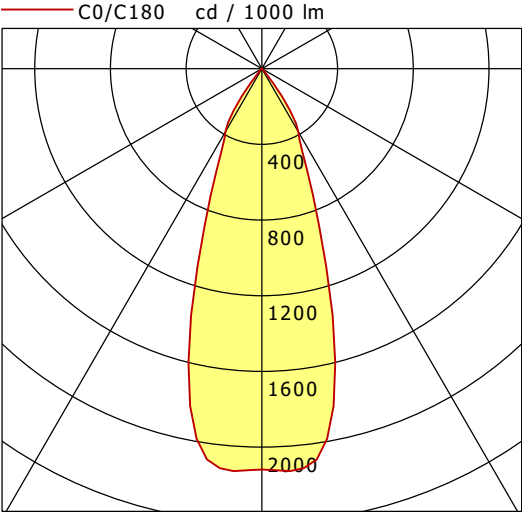

	C0	C90	C180	C270
0°	2119	2119	2119	2119
15°	1483	1483	1483	1483
30°	385	385	385	385
45°	11	11	11	11
60°	2	2	2	2
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

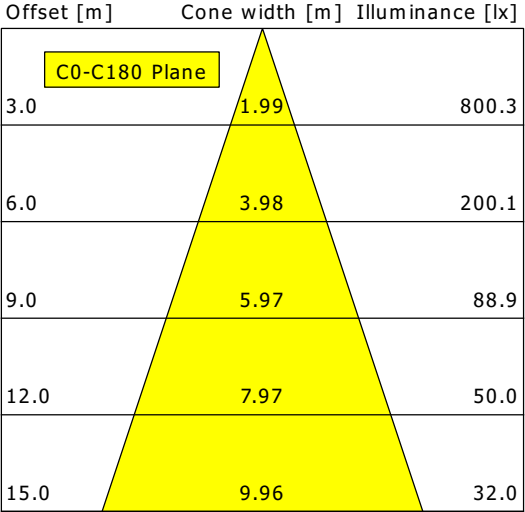

η		LED
Efficiency		126 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.6
UGR C90/C270		19.6
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		> 90