

Connector - with screwless terminals, for harsh applications



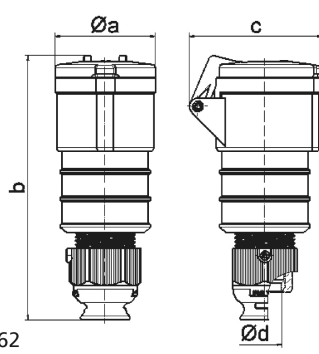
Product description	
BALS-Prd.-Nr	31536
EAN	4024941315364
Product category	Connector QUICK-CONNECT TE
Current	16A
Number of poles	5p
Poles	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 up to 240/415V

Product description	
Frequency	50 and 60Hz
Protection degree	IP44
Colour code	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Enclosure red RAL 3000, Cable gland grey RAL 7035
Connection design	screwless spring terminals as cage clamp with Kontex-contact
Maximum conductor size	2,5 qmm
Cable entry	Cable gland
Height	173mm
Width	65mm
Depth	86mm
Material of enclosure	Polyamide
Contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	For cable diameter from 10 up to max. 21 mm, Multi-Grip cable gland with gasket, integrated cable clamp and additional water evacuation openings

Logistics data	
Weight/pcs	0.198 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941315364
Length	86 mm
Width	65 mm
Height	173 mm
Weight	0.199 kg
Volume	967.07 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941950190
Length	245 mm
Width	177 mm
Height	185 mm
Weight	2.113 kg
Volume	7,140 ccm

	Ampere	16	16	16	32	32	32
	Polzahl	3	4	5	3	4	5
a Ø		51,0	58,0	65,0	66,5	66,5	72,0
b		156,0	162,0	168,0	195,0	195,0	198,0
c		72,0	78,0	86,0	89,0	89,0	99,0
d Ø		18,0	18,0	21,0	23,0	23,0	27,0
Leiter mm² min		1	1	1	2,5	2,5	2,5
Leiter mm² max		2,5	2,5	2,5	6	6	6