


PLL 52.1200.30.2/DALI


PL 52 (1xLED 156W 830/3000K 16940lm)

— C0/C180 cd / 1000 lm - - - C90/C270

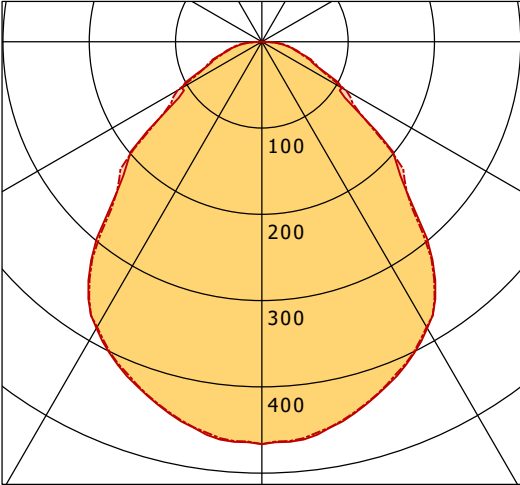

	C0	C90	C180	C270
0°	466	466	466	466
15°	441	440	441	440
30°	383	382	383	382
45°	232	235	232	235
60°	107	113	107	113
75°	41	44	41	44
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

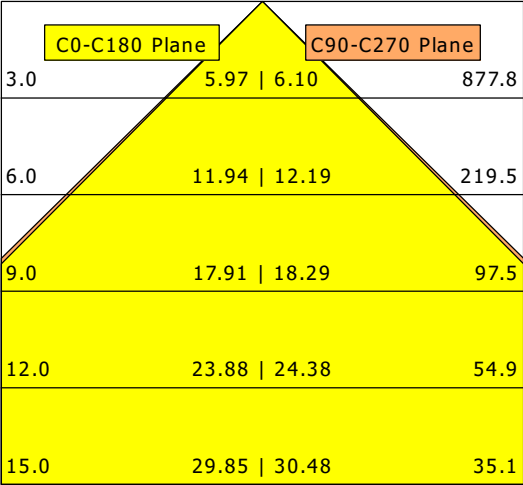

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	156 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.8
UGR C90/C270	18.9
CIE Flux Codes	60 87 97 100 100
Ra/CRI	> 80