
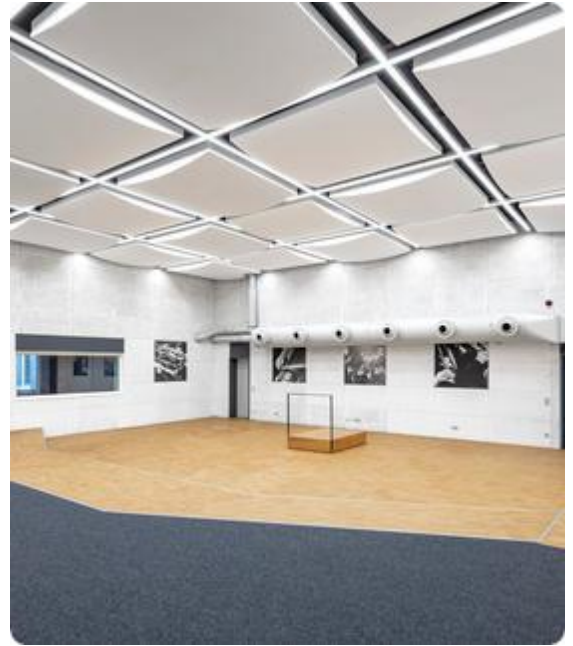


# lightnet

## Matric-A3

Surface mounted light-line - Direct light distribution

Article code: LA3OEE-830M-L1765

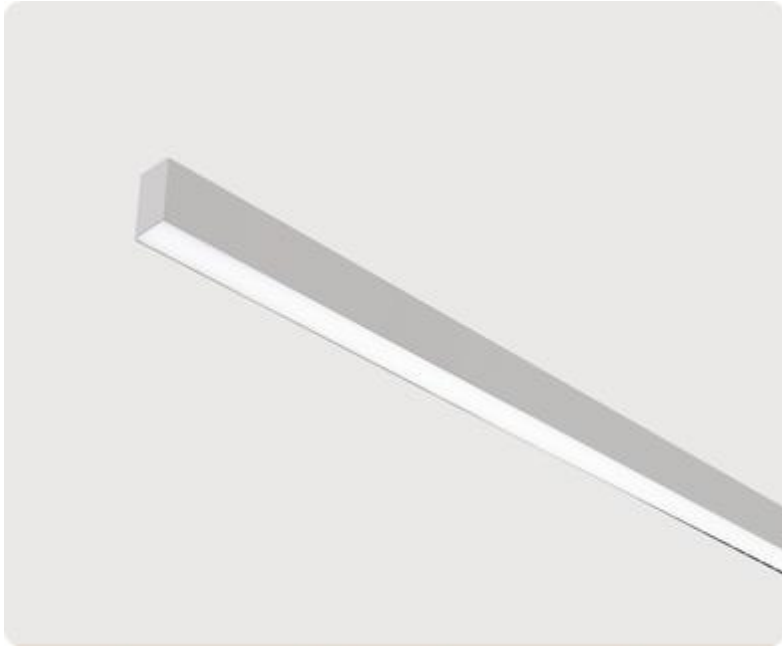

Illustrations may only be similar and serve as an orientation.

Matric-A3. LED. Wall or ceiling mounted light-line.  
Luminaire body made of high-quality aluminum profile.  
Surface finish Silver Anodised. Direct only light distribution.  
Colour temperature: 3000K (Warm White). Colour  
Rendering Index (CRI): >80. Opal diffuser for enhanced  
light transmission and perfect uniform illumination.  
Switchable. LxWxH (rectangular). R<sub>e</sub>G<sub>r</sub>R<sub>l</sub> ¼»R<sub>l</sub> L=  
1765mm. W=55mm. H=75mm. Medium-power current.


3553lm. 30W. 4,3kg. Binning initial <= MacAdam 3. IP20.  
Protection class I. CE, UKCA marking. Prüfzeichen: ENEC.  
IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux  
reduction up to 0,3%/1.000 operating hours. Nominal failure  
rate: 0,2%/1.000 operating hours. L85B10 (t<sub>q</sub> 25°C) =  
50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO  
9001:2015 certificated

# lightnet

## Matric-A3

Surface mounted light-line - Direct light distribution

Article code: LA3OEE-830M-L1765

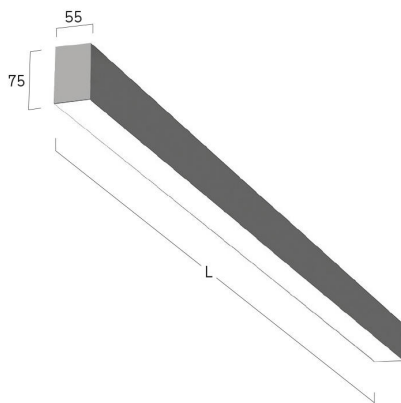

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Matric-A3
Lamp	LED
Installation Type	Surface mounted light-line
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Switchable
Length L/Diameter D (mm)	L=1765mm
Width W (mm)	W=55mm
Height H (mm)	H=75mm
Current/Power	Medium-Power
Luminous Flux	3553lm
Power consumption	30W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	4,3kg

