


PLL 57.1225.40.1/DALI


PL 57 (1xLED 197W 840/4000K 21660lm)

— C0/C180 cd / 1000 lm - - - C90/C270

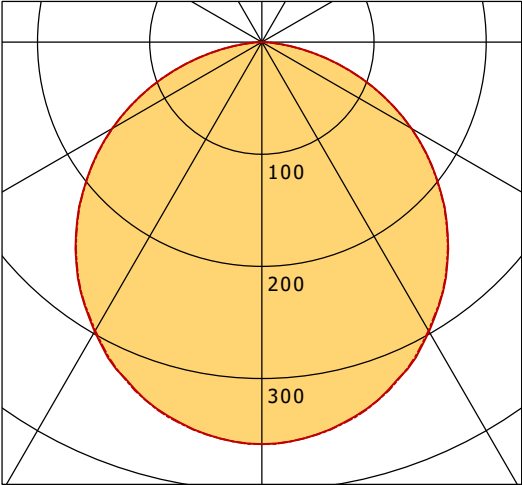

	C0	C90	C180	C270
0°	359	359	359	359
15°	342	343	342	343
30°	298	297	298	297
45°	234	233	234	233
60°	154	154	154	154
75°	65	65	65	65
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

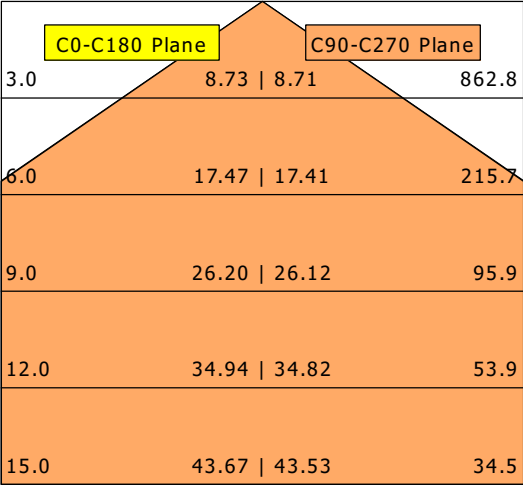

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	197 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.9
UGR C90/C270	21.9
CIE Flux Codes	48 79 96 100 100
Ra/CRI	> 80