


FYR 104.0600.830/DALI


Fyrre (1xLED 37W 830/3000K 4140lm)

— C0/C180 cd / 1000 lm - - - C90/C270

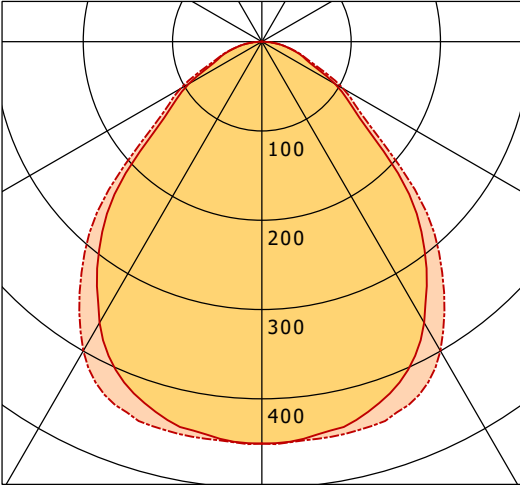

	C0	C90	C180	C270
0°	450	450	450	450
15°	434	448	434	448
30°	363	400	363	400
45°	225	252	225	252
60°	95	105	95	105
75°	35	37	35	37
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

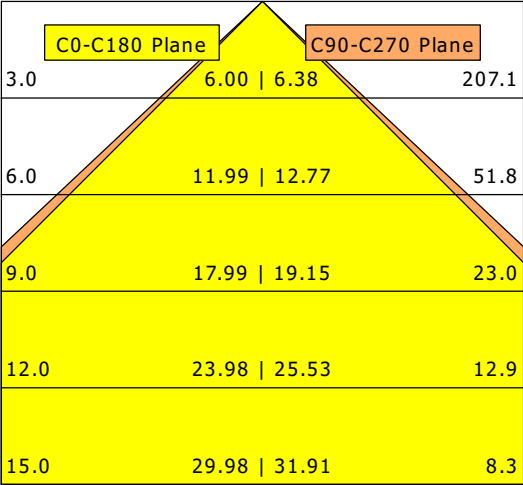

η		LED
Efficiency		112 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		37 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.4
UGR C90/C270		18.7
CIE Flux Codes		60 87 97 100 100
Ra/CRI		> 80