


LUNXXS 201.830.1/DALI


Lunata XXSmall (1xLED 17W 830/3000K 1370lm)

— C0/C180 cd / 1000 lm - - - C90/C270

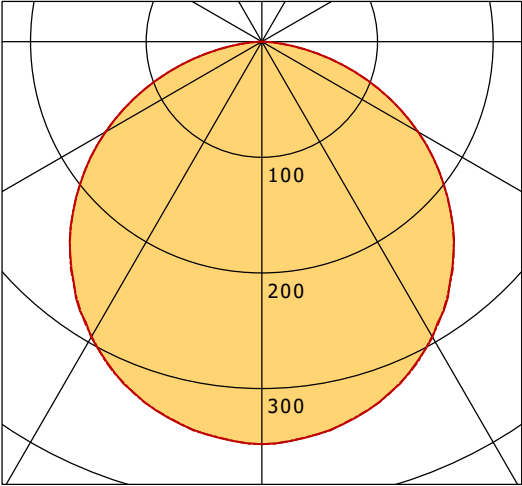

	C0	C90	C180	C270
0°	348	348	348	348
15°	334	333	334	333
30°	295	294	295	294
45°	235	234	235	234
60°	156	156	156	156
75°	66	66	66	66
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

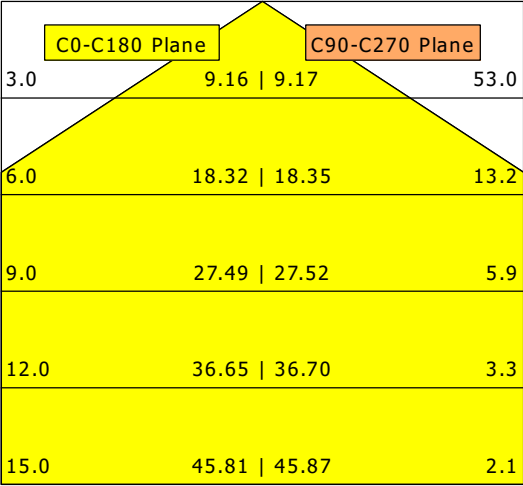

η	LED
Efficiency	81 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	17 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.7
UGR C90/C270	22.7
CIE Flux Codes	47 79 96 100 100
Ra/CRI	> 80