



SIRUX-T 202.940.WF

Sirux (1xLED 17W 940/4000K 2290lm 49°)

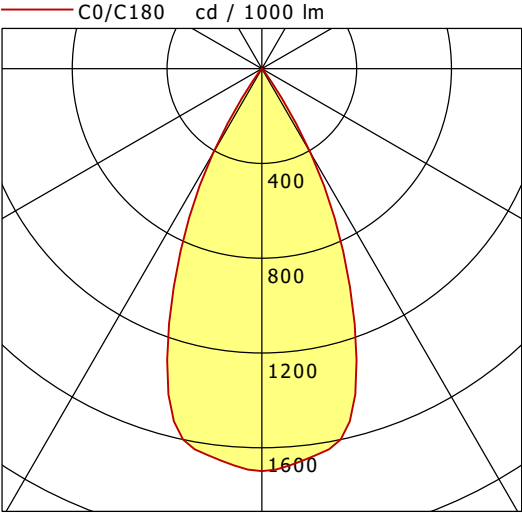

	C0	C90	C180	C270
0°	1699	1699	1699	1699
15°	1487	1487	1487	1487
30°	412	412	412	412
45°	2	2	2	2
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

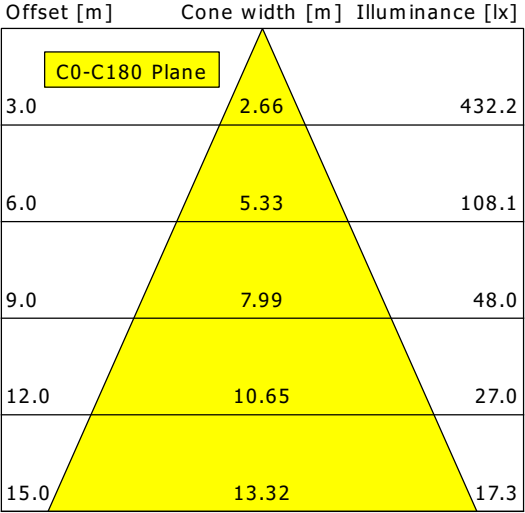

η		LED
Efficiency		135 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		17 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		16.9
UGR C90/C270		16.9
CIE Flux Codes	100 100 100 100 100	
Ra/CRI		> 90