



SCOUT 203.930.50.2/DALI-ST

Scout Next (1xLED 29W 930/3000K 3030lm 50°)

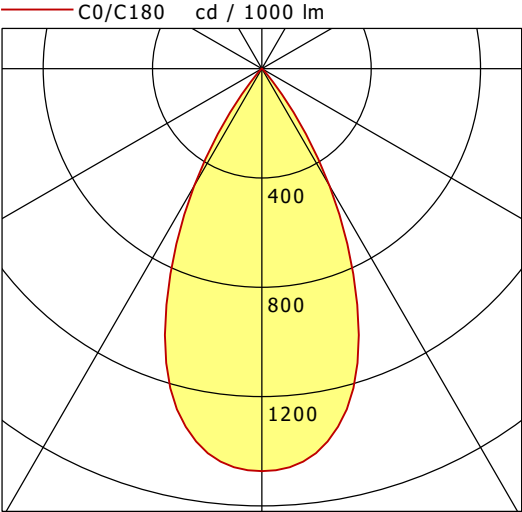

	C0	C90	C180	C270
0°	1473	1473	1473	1473
15°	1252	1252	1252	1252
30°	495	495	495	495
45°	13	13	13	13
60°	2	2	2	2
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

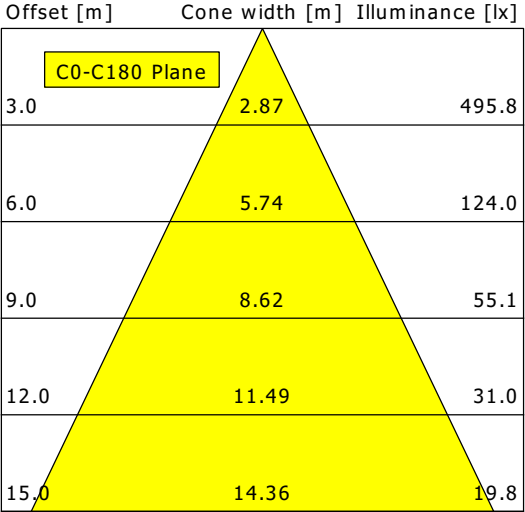

η		LED
Efficiency		105 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		29 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.0
UGR C90/C270		20.0
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		>90