



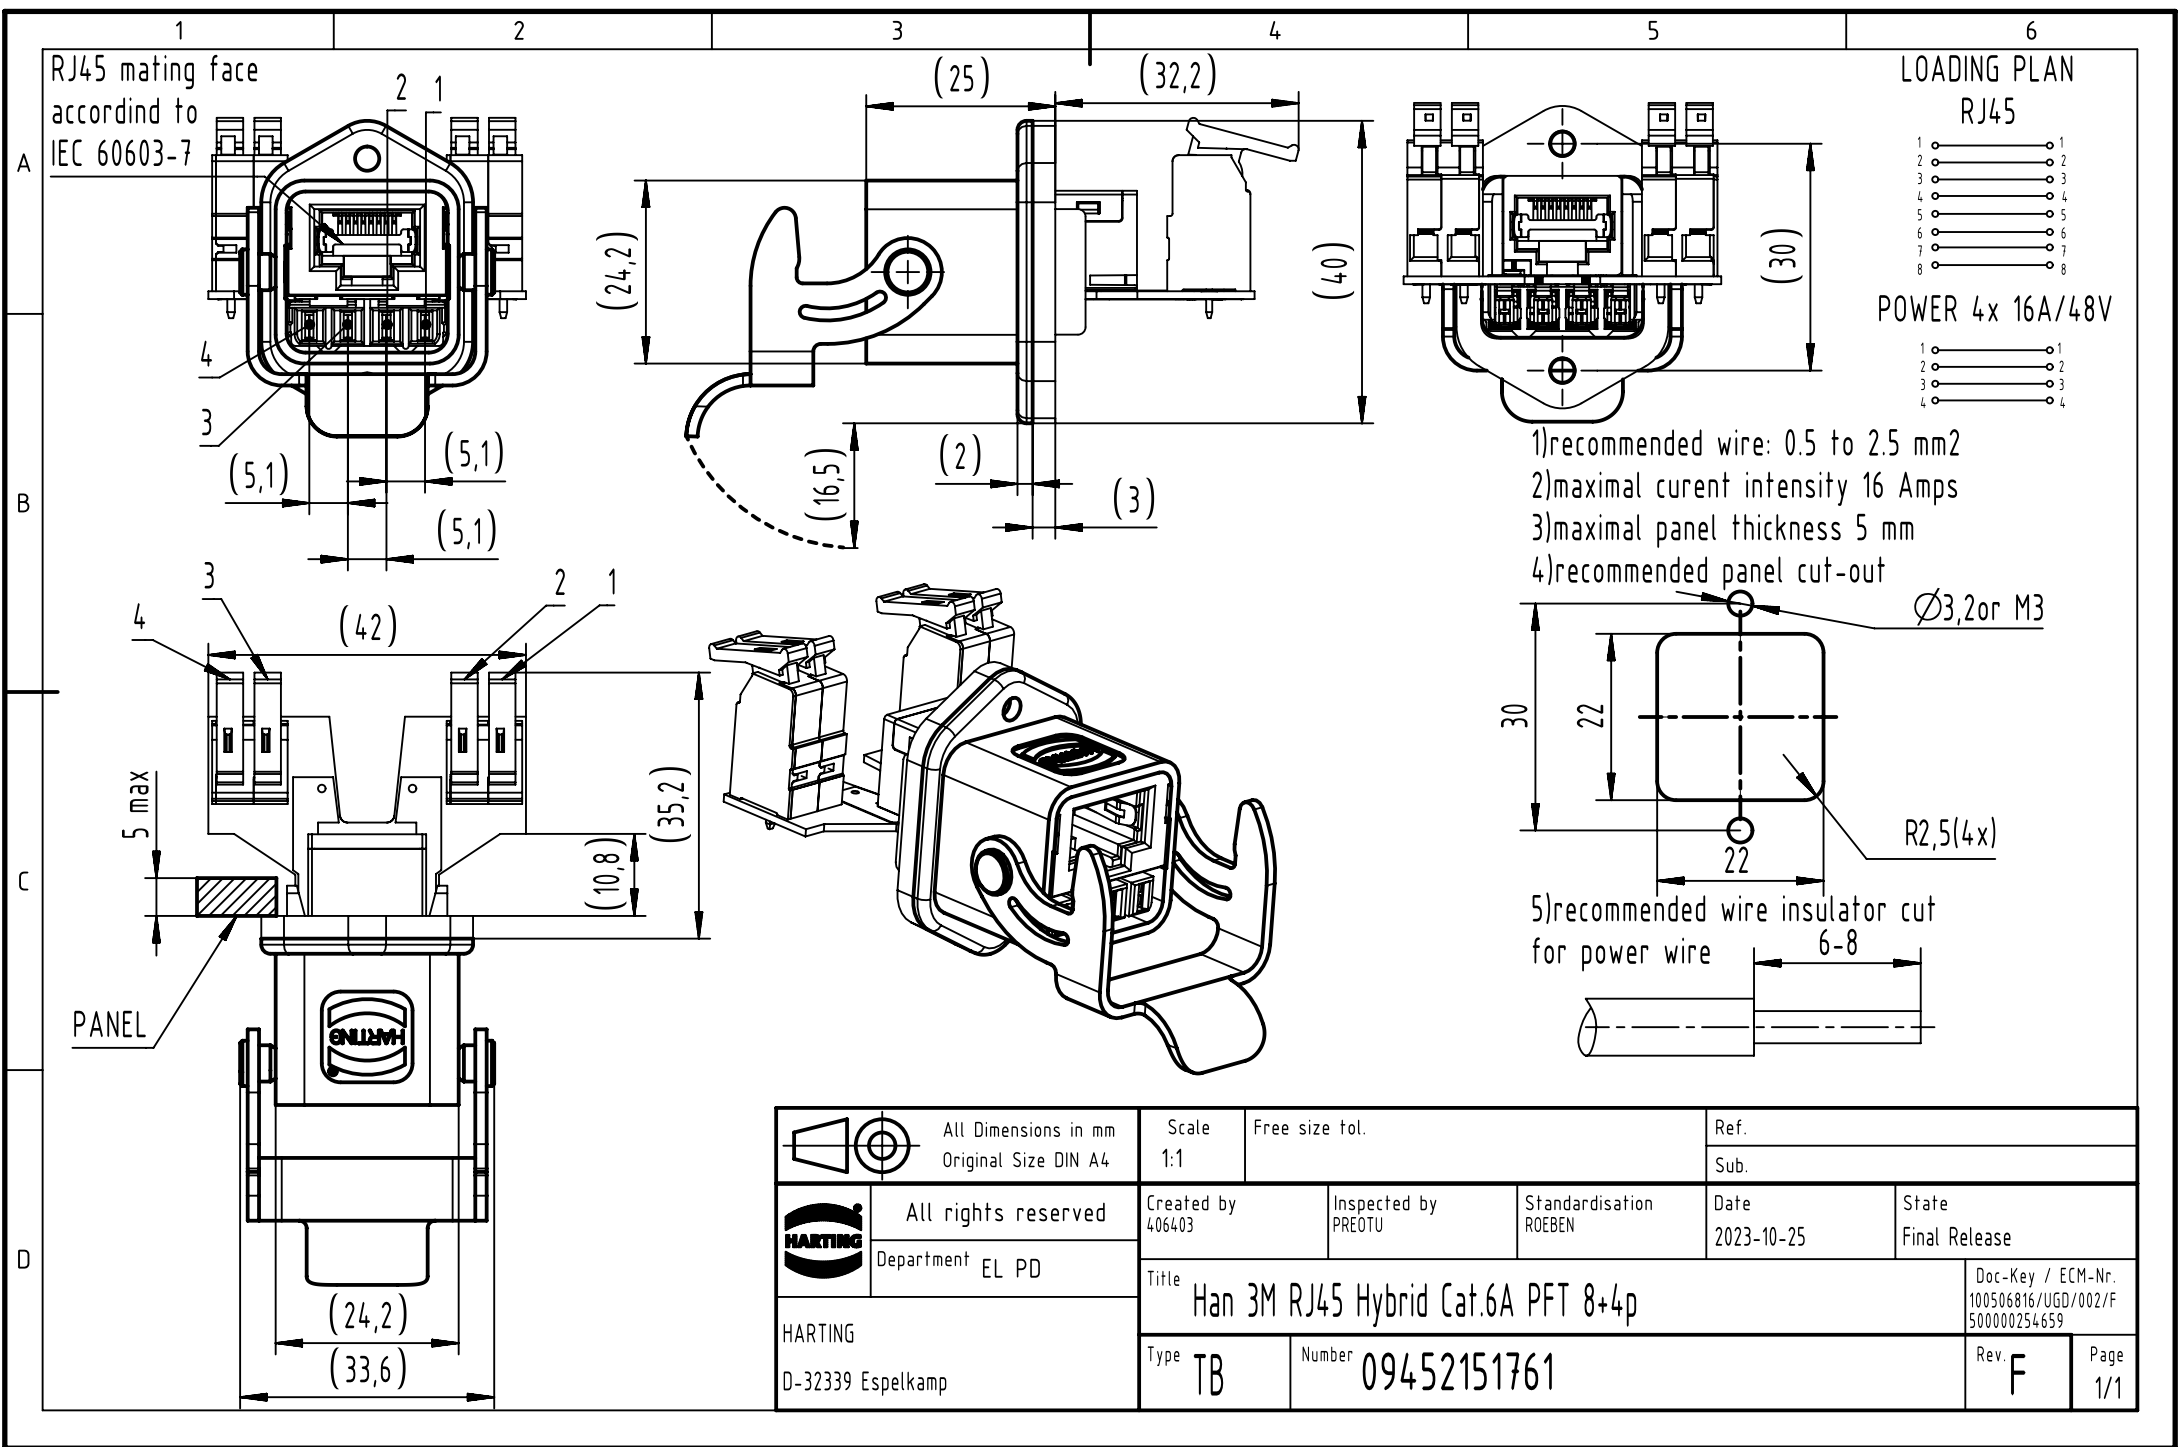


RJ45 mating face
accordind to
IEC 60603-7


LOADING PLAN
RJ45



- 1)recommended wire: 0.5 to 2.5 mm²
- 2)maximal curent intensity 16 Amps
- 3)maximal panel thickness 5 mm
- 4)recommended panel cut-out

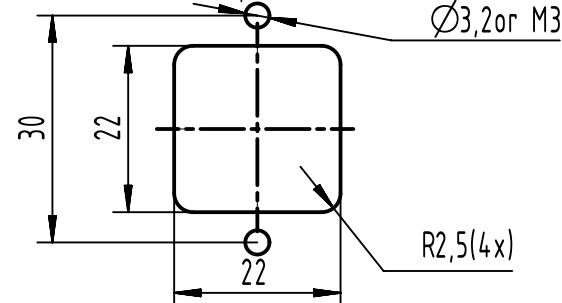

- 5)recommended wire insulator cut
for power wire



 		All Dimensions in mm Original Size DIN A4			Scale 1:1	Free size tol.		Ref.						
								Sub.						
		All rights reserved			Created by 406403		Inspected by PREOTU		Standardisation ROEBEN		Date 2023-10-25		State Final Release	
		Department EL PD												
HARTING D-32339 Espelkamp		Title Han 3M RJ45 Hybrid Cat.6A PFT 8+4p										Doc-Key / ECM-Nr. 100506816/UGD/002/F 500000254659		
		Type TB		Number 09452151761								Rev. F		Page 1/1