

## Panel mounting socket outlet, angled - flange 114x114, fixing centers 90x90




| Product description       |                                         |
|---------------------------|-----------------------------------------|
| BALS-Prd.-Nr              | 12275                                   |
| EAN                       | 4024941122757                           |
| Product category          | TE panel mounting socket outlet, angled |
| Current                   | 63A                                     |
| Number of poles           | 4p                                      |
| Poles                     | 3P+PE                                   |
| Position of earth contact | 5 h                                     |
| Voltage                   | 600 up to 690V                          |

| Product description            |                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------|
| Frequency                      | 50 and 60Hz                                                                                              |
| Protection degree              | IP44                                                                                                     |
| Colour code                    | black RAL 9005                                                                                           |
| Colour of appliance            | Hinged lid black RAL 9005, Enclosure grey RAL 7035                                                       |
| Connection design              | screw terminal as box terminal with Kontex-contact                                                       |
| Maximum conductor size         | 25.0 qmm                                                                                                 |
| Cable entry                    | other                                                                                                    |
| Height                         | 119mm                                                                                                    |
| Width                          | 114mm                                                                                                    |
| Depth                          | 148mm                                                                                                    |
| Flange size vertical           | 114mm                                                                                                    |
| Flange size horizontal         | 114mm                                                                                                    |
| Drill hole distance vertical   | 90mm                                                                                                     |
| Drill hole distance horizontal | 90mm                                                                                                     |
| Material of enclosure          | Polyamide                                                                                                |
| Contact                        | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.46 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941122757 |
| Length         | 148 mm        |
| Width          | 114 mm        |
| Height         | 119 mm        |
| Weight         | 0.461 kg      |
| Volume         | 2,007.768 ccm |
| Packaging      | Carton        |
| Content amount | 5 ST          |
| EAN            | 4024941837958 |
| Length         | 295 mm        |
| Width          | 185 mm        |
| Height         | 215 mm        |
| Weight         | 2.464 kg      |
| Volume         | 9,975 ccm     |

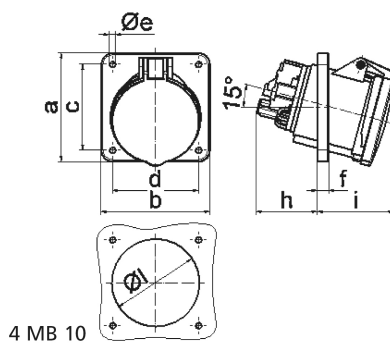

4 MB 10

| Ampere         | 63    | 63    | 63    |  |  |  |
|----------------|-------|-------|-------|--|--|--|
| Polzahl        | 3     | 4     | 5     |  |  |  |
| a              | 114,0 | 114,0 | 114,0 |  |  |  |
| b              | 114,0 | 114,0 | 114,0 |  |  |  |
| c              | 90,0  | 90,0  | 90,0  |  |  |  |
| d              | 90,0  | 90,0  | 90,0  |  |  |  |
| e ø            | 6,5   | 6,5   | 6,5   |  |  |  |
| f              | 12,0  | 12,0  | 12,0  |  |  |  |
| h              | 65,0  | 65,0  | 65,0  |  |  |  |
| i              | 81,0  | 81,0  | 81,0  |  |  |  |
| l              | 92,0  | 92,0  | 92,0  |  |  |  |
| Leiter mm² min | 6     | 6     | 6     |  |  |  |
| Leiter mm² max | 25    | 25    | 25    |  |  |  |
|                |       |       |       |  |  |  |
|                |       |       |       |  |  |  |