


# LUZ-T14 103.840.AS/DALI-ST

LUZ | Track-Mounted (1xLED 22W 840/4000K 3380lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

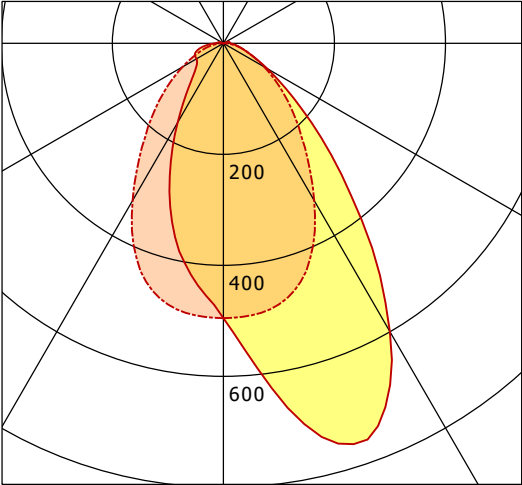

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 495 | 495 | 495  | 495  |
| 15°          | 742 | 469 | 348  | 469  |
| 30°          | 600 | 327 | 165  | 327  |
| 45°          | 262 | 178 | 73   | 178  |
| 60°          | 91  | 85  | 56   | 85   |
| 75°          | 34  | 33  | 49   | 33   |
| 90°          | 13  | 1   | 15   | 1    |
| cd / 1000 lm |     |     |      |      |

LDC unsuitable for cone representation.  
Asymetric LDC.

|                        |                 |
|------------------------|-----------------|
| <b>η</b><br>Efficiency | LED<br>154 lm/W |
| Direct/Indirect        | ↓ 99% / ↑ 1%    |
| System Power           | 22 W            |
| <b>UGR</b>             | X=4H, Y=8H      |
| Reflection factors     | 70/50/20        |
| UGR C0/C180            | 22.6            |
| UGR C90/C270           | 22.2            |
| CIE Flux Codes         | 65 88 97 99 100 |
| Ra/CRI                 | > 80            |