
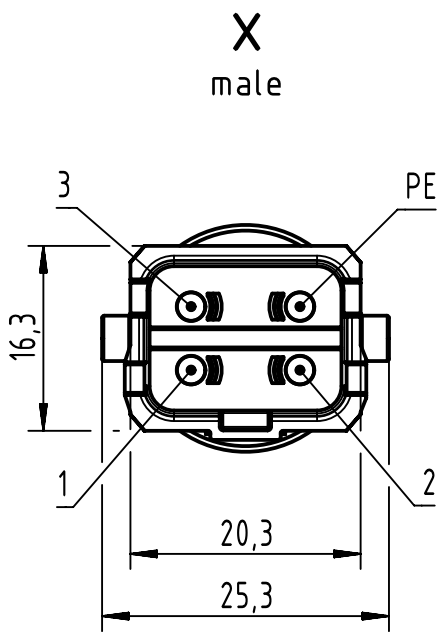


Connector Location A


Connector Location B

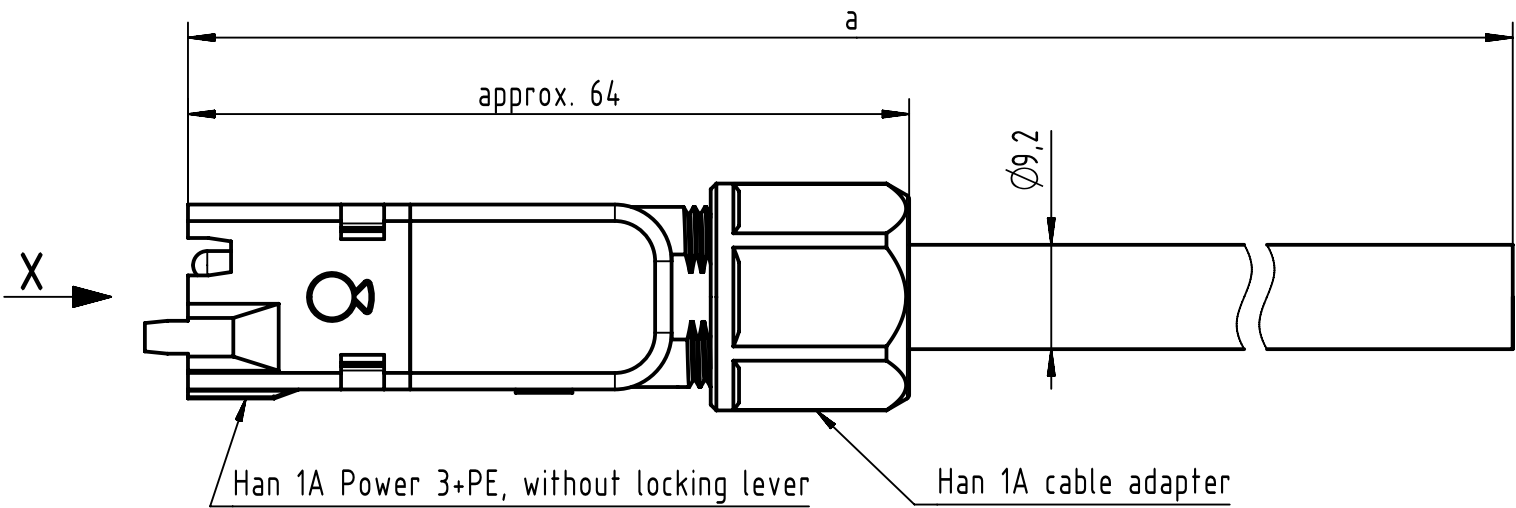

Loading Plan

- 1 wire 1
- 2 wire 2
- 3 wire 3
- PE green/yellow

NOTE:
* Silver plated contacts
- Protection level: IP65
- Temperature range: -30°C ... +80°C

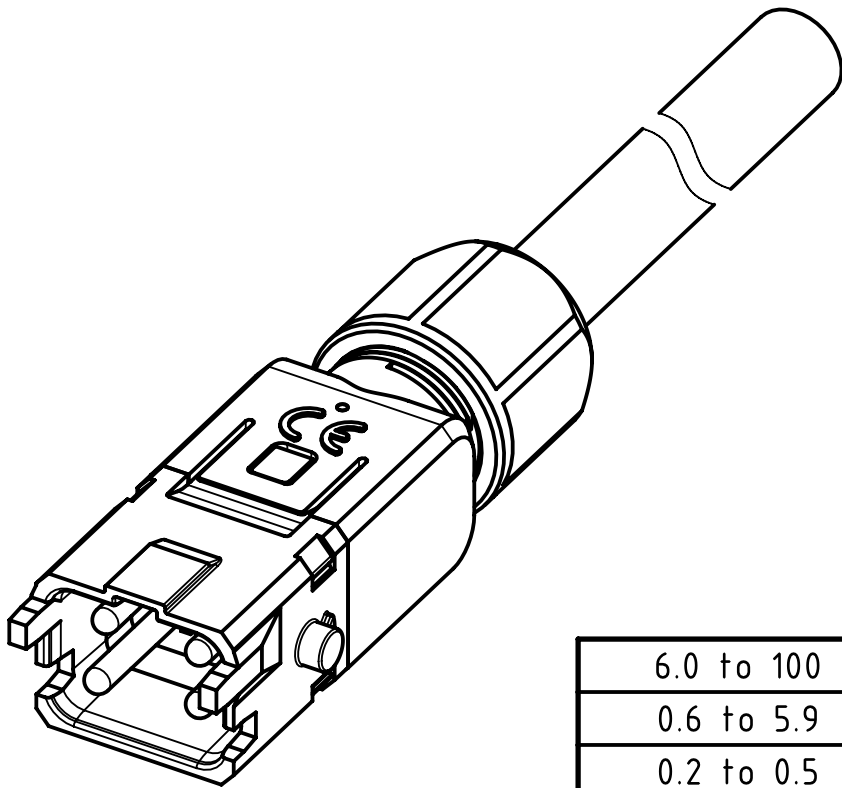

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

JZ-500 4G2.5mm², PVC, grey	33500200201XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by 402676	Inspected by COSTEA	Standardisation MUNTEANV	Date 2020-12-16	State Final Release	
	Department HCS - RO	Gross	Costea	Muntean			
HARTING Customised Solutions		Title Han1A CA 3+PE -lever m/- PVC				Doc-Key / ECM-Nr. 100838791/UGD/000/B 500000186250	
D-32339 Espelkamp		Type TB	Number 33500200201XXX			Rev. B	Page 1/1