


RENOV8 10840.1200.1/DALI


Renov8 | LED Refurbishment Light-Insert | T8/G13 (1xLED 16W 840/4000K 2990lm)

— C0/C180 cd / 1000 lm - - - C90/C270

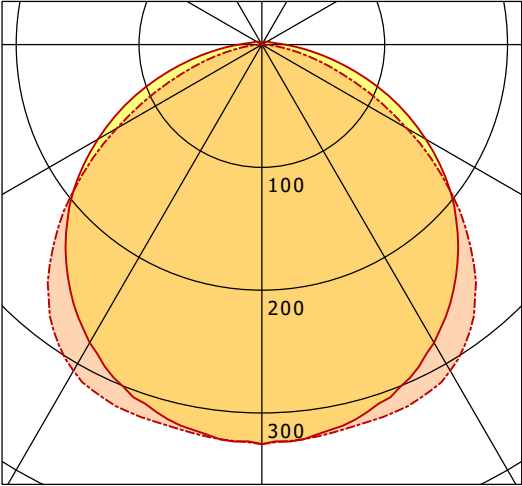

	C0	C90	C180	C270
0°	325	325	325	325
15°	313	319	313	319
30°	280	307	280	307
45°	226	242	226	242
60°	154	136	154	136
75°	74	44	74	44
90°	19	0	19	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

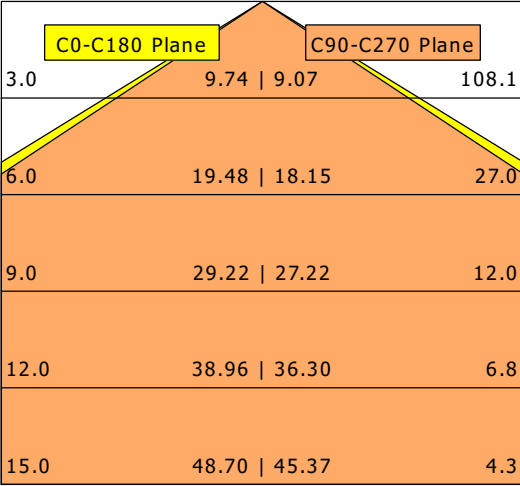

η	LED
Efficiency	187 lm/W
Direct/Indirect	↓ 97% / ↑ 3%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.2
UGR C90/C270	24.9
CIE Flux Codes	46 77 94 97 100
Ra/CRI	> 80