


PLL 20.1800.30/DALI


PL 20 (1xLED 390W 830/3000K 32880lm)

— C0/C180 cd / 1000 lm - - - C90/C270

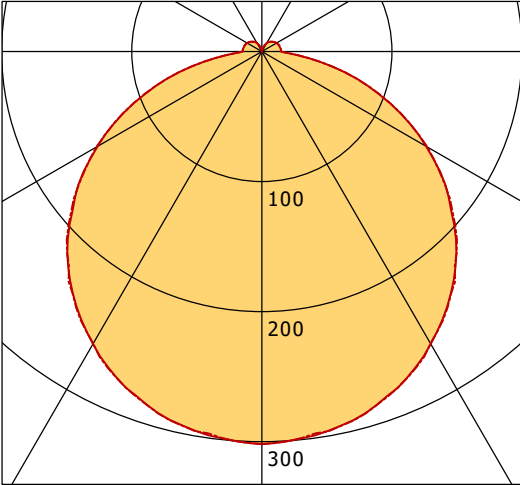

	C0	C90	C180	C270
0°	302	302	302	302
15°	291	291	291	291
30°	260	259	260	259
45°	211	212	211	212
60°	146	147	146	147
75°	71	71	71	71
90°	15	15	15	15
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

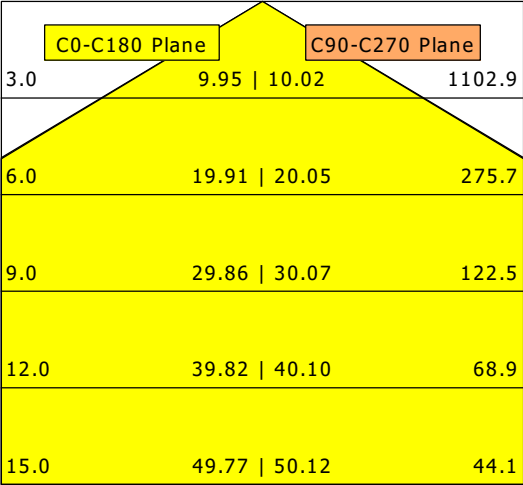

η	LED
Efficiency	84 lm/W
Direct/Indirect	↓ 93% / ↑ 7%
System Power	390 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.2
UGR C90/C270	21.2
CIE Flux Codes	44 76 94 93 100
Ra/CRI	> 80