


ML-A 070.11840.2 AOV/DALI


Monoline 070 | Surface-Mounted (1xLED 26W 840/4000K 3870lm)

— C0/C180 cd / 1000 lm - - - C90/C270

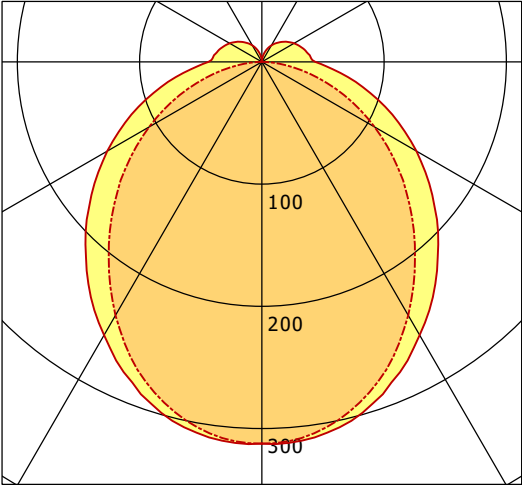

	C0	C90	C180	C270
0°	312	312	312	312
30°	258	240	258	240
60°	146	106	146	106
90°	44	1	44	1
120°	30	0	30	0
150°	16	1	16	1
180°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

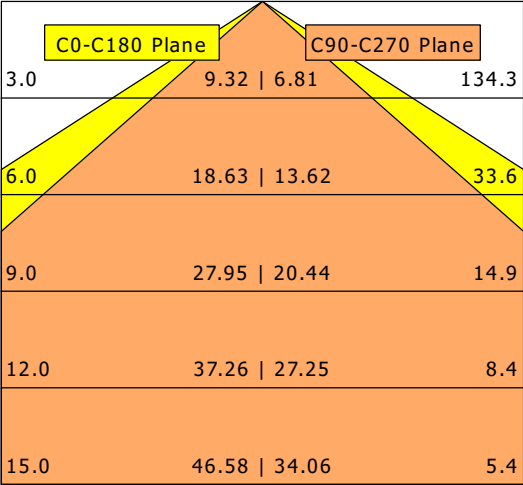

η		LED
Efficiency		149 lm/W
Direct/Indirect		↓ 89% / ↑ 11%
System Power		26 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		24.7
UGR C90/C270		23.1
CIE Flux Codes		45 75 92 89 100
Ra/CRI		> 80