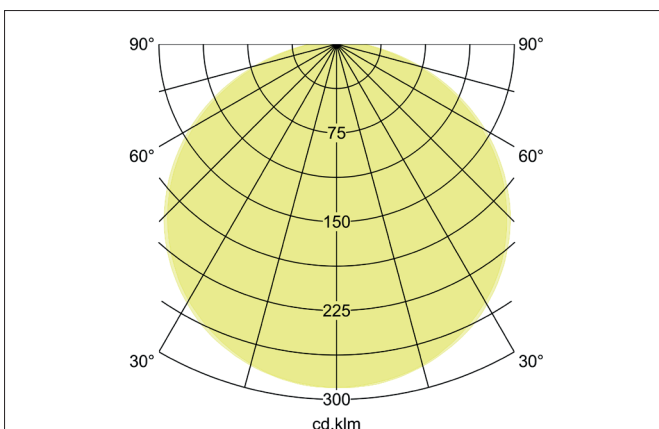
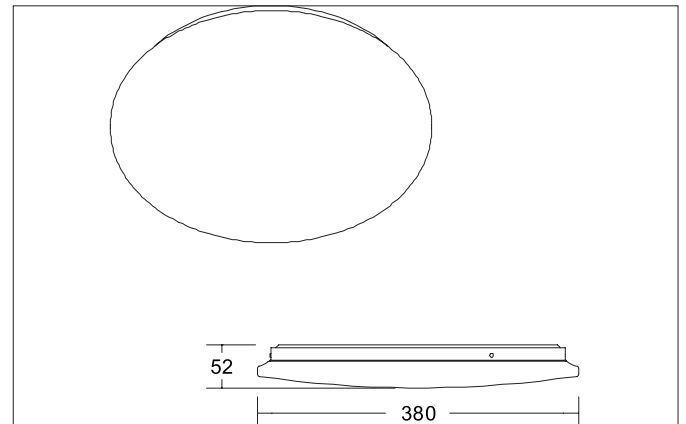


**PANAY MAXI LED surface-mounted ceiling light, switchable, with microwave motion sensor**

Article no. 12578073

Light.  
For Generations.**Tender**

LED surface-mounted ceiling light, switchable, with microwave motion sensor, Round. Luminaire diameter 380.0 mm, Height 52.0 mm Weight 0.435 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 2.600 lm, Power 1 x 24 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Steel / Plastic, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, shock resistance according to IEC62262: IK05. With electronic driver, on/off switchable.

**Product Benefits**

- Preisinteressante Decken- oder Wandenbauleuchte in runder Bauform.
- Ausführung 3.000 K, schaltbar, mit Mikrowellen-Sensor.
- Drei verschiedene Größen verfügbar.
- Zusätzlich in Ausführung 3CCT (3.000 K / 4.000 K / 6.000 K) und Phasenabschnitt dimmbar lieferbar.

**PANAY MAXI LED surface-mounted ceiling light, switchable, with microwave motion sensor**

Article no. 12578073

Light.  
For Generations.

Article data	
Article no.	12578073
GTIN	4255752500674
Series name	PANAY MAXI
Short description	LED surface-mounted ceiling light, switchable, with microwave motion sensor
Material	Steel / Plastic
Colour	White
Type of surface	Glossy
Shape	Round
Outer diameter	380 mm
Hight	52 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung, schaltbar und Mikrowellen-Bewegungssensor
Weight	0.435 kg

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	2,600 lm
System efficiency	108 lm/W
Colour rendering	CRI > 80
Beam angle	120°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	24 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP20
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK05
stamp	UKCA
Material cover	Plastic, opal

Packing data	
Gross weight	0.485 kg
Length of packaging	390 mm
Packaging width	390 mm
Packaging hight	65 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

**PANAY MAXI LED surface-mounted ceiling light, switchable, with  
microwave motion sensor**

Article no. 12578073

Light.  
For Generations.