

BASIC MAX G1/P1 | SUSPENDED TUBE SUSPENSION (D400 - D600)

1. MONTAGE UND INSTALLATION | MOUNTING AND INSTALLATION:

D400 - D600
 TUBE: Ø13

1. Bei allen Montagearbeiten Handschuhe tragen.
 Use gloves when handling the fixture.

2. Montageöffnungen.
 Installation openings.

3.

4.

5.

- min/max stripped wire length: 7mm-10mm

- max power supply cable: 1,5mm²

6.

7.

8.

Diffuser direction

INSIDE
gloss

prism matt


OUTSIDE

9. Caution: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.


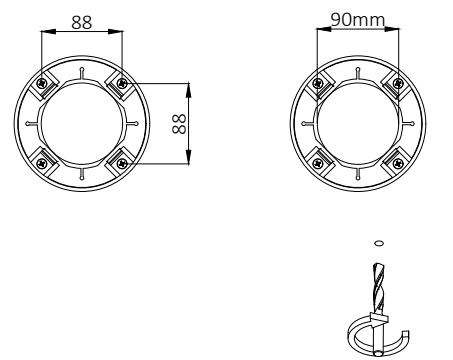
BASIC MAX G1/P1 | SUSPENDED TUBE SUSPENSION (D900)

1. MONTAGE UND INSTALLATION | MOUNTING AND INSTALLATION:


D900
 TUBE: Ø35

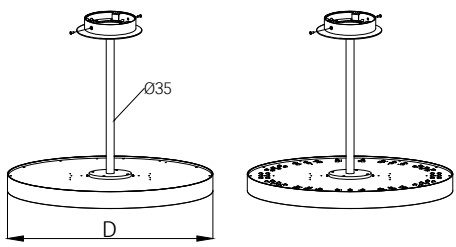


1. Bei allen Montagearbeiten Handschuhe tragen.
 Use gloves when handling the fixture.


2. Montageöffnungen.
 Installation openings.

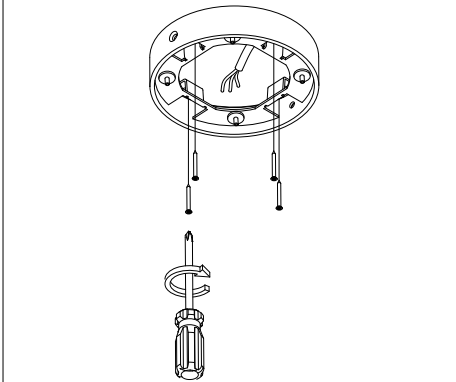

3.

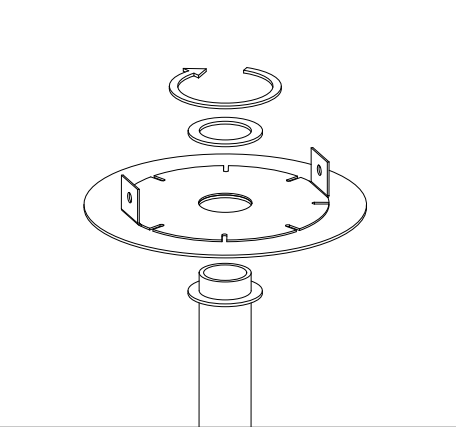


4.

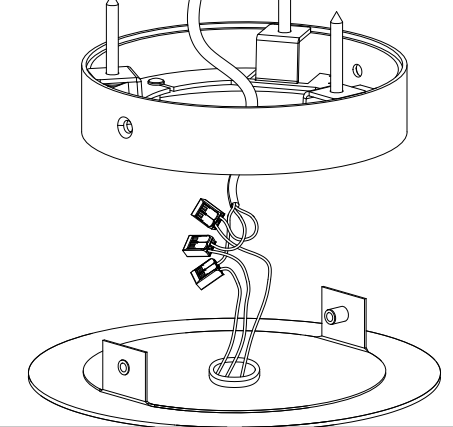


5.


- min/max stripped wire length: 7mm-10mm
- max power supply cable: 1,5mm²

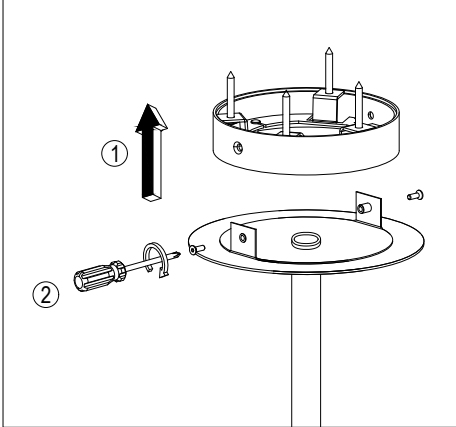

6.

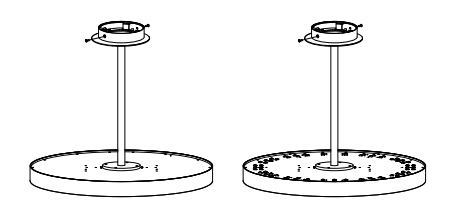

Diffuser direction



7. Caution: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.