


LUZ-A22 103.830.60/DALI


LUZ | Surface-Mounted (1xLED 22W 830/3000K 3270lm 60°)

— C0/C180 cd / 1000 lm - - - C90/C270

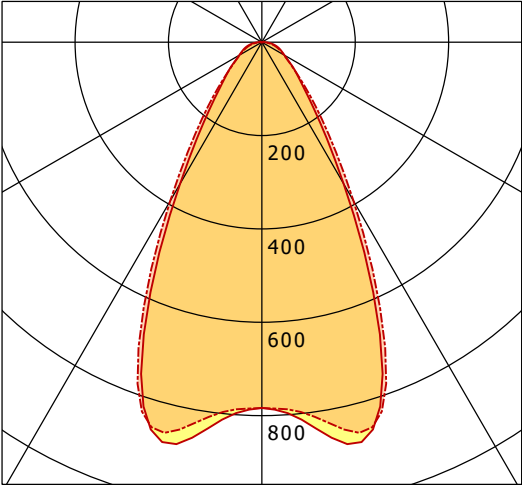

	C0	C90	C180	C270
0°	784	784	784	784
15°	876	863	876	863
30°	350	393	350	393
45°	116	124	116	124
60°	56	54	56	54
75°	32	28	32	28
90°	7	2	7	2
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

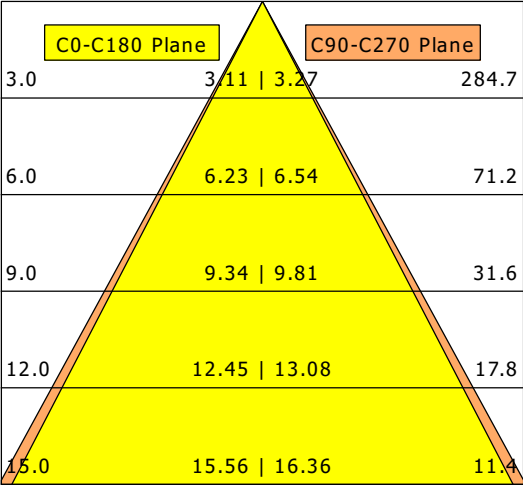

η		LED
Efficiency		149 lm/W
Direct/Indirect		↓ 99% / ↑ 1%
System Power		22 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.4
UGR C90/C270		20.1
CIE Flux Codes		76 90 97 99 100
Ra/CRI		> 80