
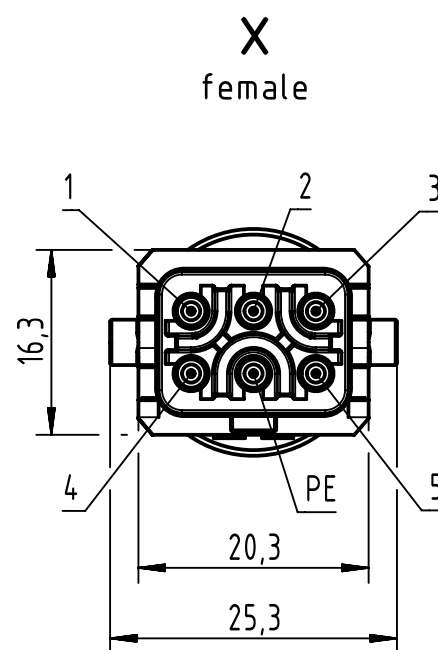



# Connector Location A

# Connector Location B

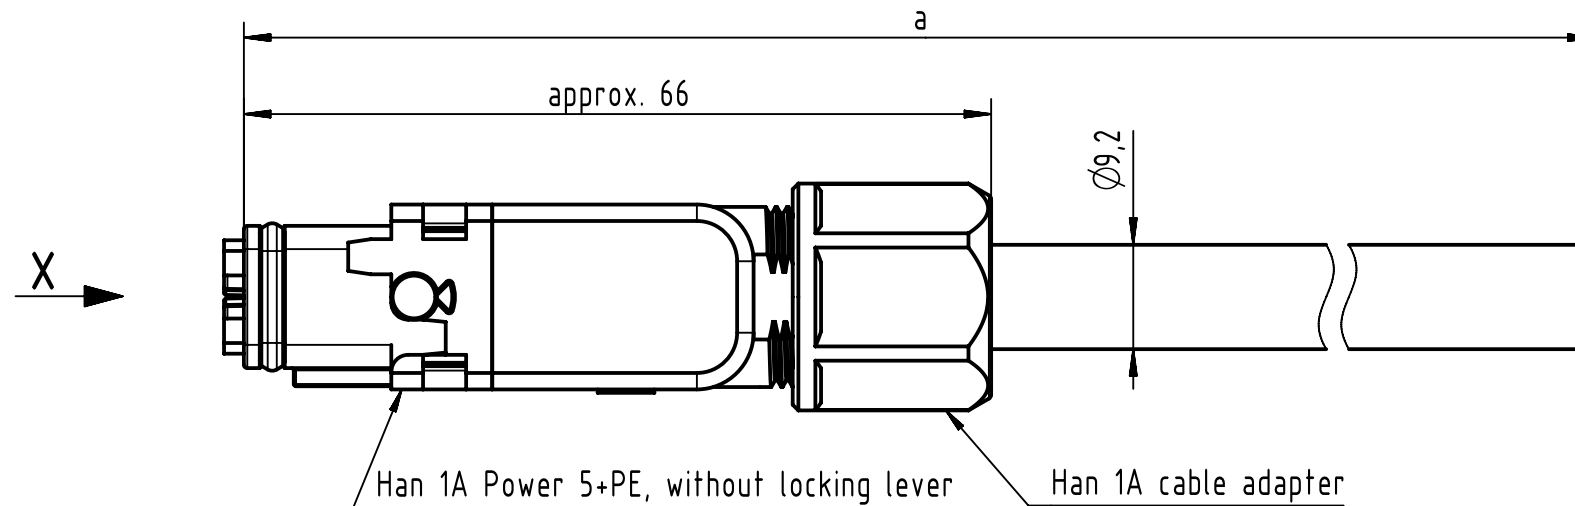

## Loading Plan

|    |              |
|----|--------------|
| 1  | wire 1       |
| 2  | wire 2       |
| 3  | wire 3       |
| 4  | wire 4       |
| 5  | wire 5       |
| PE | green/yellow |

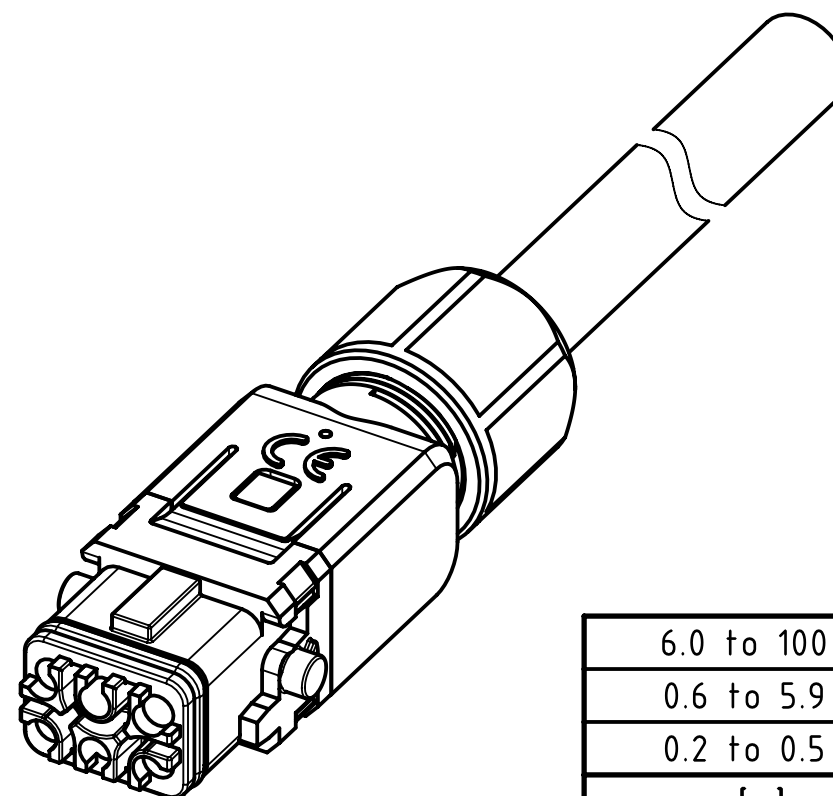

NOTE:  
 \* Silver plated contacts  
 - Protection level: IP65  
 - Temperature range: -30°C ... +80°C

|                                |       |         |
|--------------------------------|-------|---------|
| length<br>in<br>"1m"<br>step   | 100   | XXX=000 |
|                                | 99    | XXX=990 |
|                                | .     | .       |
|                                | 12    | XXX=120 |
| length<br>in<br>"0.1m"<br>step | 11    | XXX=110 |
|                                | 10    | XXX=100 |
|                                | 9.9   | XXX=099 |
|                                | 9.8   | XXX=098 |
|                                | .     | .       |
|                                | 0.5   | XXX=005 |
|                                | 0.4   | XXX=004 |
|                                | 0.3   | XXX=003 |
|                                | 0.2   | XXX=002 |
| Step                           | a [m] | XXX     |

|            |           |
|------------|-----------|
| 6.0 to 100 | ±1%       |
| 0.6 to 5.9 | +0.04     |
| 0.2 to 0.5 | +0.02     |
| a [m]      | Tolerance |

JZ-500 6G1.5mm², PVC, grey

33500900203XXX

Type of cable

Part no.

|                                                                                       |  |                                       |  |                                  |  |                                        |  |                                 |                                                          |  |
|---------------------------------------------------------------------------------------|--|---------------------------------------|--|----------------------------------|--|----------------------------------------|--|---------------------------------|----------------------------------------------------------|--|
|  |  | All Dimensions<br>in mm               |  | Tech. Character.                 |  | Free size tol.                         |  | According to production drawing |                                                          |  |
| All rights reserved                                                                   |  | Created by<br>402676<br>Gross         |  | Inspected by<br>COSTEA<br>Costea |  | Standardisation<br>MUNTEANV<br>Muntean |  | Date<br>2020-12-16              |                                                          |  |
| Department HCS - RO                                                                   |  | State<br>Final Release                |  |                                  |  |                                        |  |                                 |                                                          |  |
| HARTING Customised Solutions<br>D-32339 Espelkamp                                     |  | Title<br>Han1A CA 5+PE -lever f/- PVC |  |                                  |  |                                        |  |                                 | Doc-Key / ECM-Nr.<br>100838821/UGD/000/C<br>500000186260 |  |
|                                                                                       |  | Type<br>TB                            |  | Number<br>33500900203XXX         |  |                                        |  |                                 | Rev. C                                                   |  |
|                                                                                       |  |                                       |  |                                  |  |                                        |  |                                 | Pag 1/                                                   |  |