


## Wall mounting appliance inlet - housing dimensions 260x160

| Product description       |                                                                                                                                         |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| BALS-Prd.-Nr              | 24199                                                                                                                                   |
| EAN                       | 4024941241991                                                                                                                           |
| Product category          | Wall mounting appliance inlet                                                                                                           |
| Current                   | 125A                                                                                                                                    |
| Number of poles           | 4p                                                                                                                                      |
| Arrangement of phases     | 3P+PE                                                                                                                                   |
| Position of earth contact | 9 h                                                                                                                                     |
| Voltage                   | 200 - 250V~                                                                                                                             |
| Frequency                 | 50/60Hz                                                                                                                                 |
| Protection degree         | IP67                                                                                                                                    |
| Colour code               | blue RAL 5015                                                                                                                           |
| Colour of appliance       | Collar blue RAL 5015, Bayonet ring grey RAL 7035, Housing screws grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035 |
| Connection design         | screw terminal as box terminal                                                                                                          |
| Maximum conductor size    | 50.0 qmm                                                                                                                                |
| Cable entry               | 1xM50 from above                                                                                                                        |
| Height                    | 366mm                                                                                                                                   |
| Width                     | 160mm                                                                                                                                   |
| Depth                     | 163mm                                                                                                                                   |

| Product description    |                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------|
| Dimension of enclosure | 260x160 mm (HxW)                                                                                         |
| Material of enclosure  | Polycarbonate                                                                                            |
| Contacts               | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties |                                    |
|---------------------------------|------------------------------------|
|                                 | The cable entry is one at top open |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 2.145 kg / Piece |
| Packaging      | Carton           |
| Content amount | 1 ST             |
| EAN            | 4024941241991    |
| Length         | 440 mm           |
| Width          | 225 mm           |
| Height         | 165 mm           |
| Weight         | 2.373 kg         |
| Volume         | 13,545 ccm       |

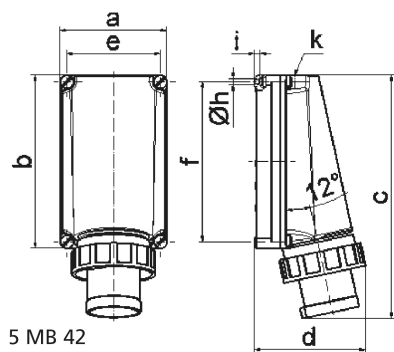

| Ampere         | 125   | 125   | 125   |  |  |  |
|----------------|-------|-------|-------|--|--|--|
| Polzahl        | 3     | 4     | 5     |  |  |  |
| a              | 160,0 | 160,0 | 160,0 |  |  |  |
| b              | 260,0 | 260,0 | 260,0 |  |  |  |
| c              | 364,0 | 364,0 | 364,0 |  |  |  |
| d              | 165,0 | 165,0 | 165,0 |  |  |  |
| e              | 140,0 | 140,0 | 140,0 |  |  |  |
| f              | 240,0 | 240,0 | 240,0 |  |  |  |
| h ø            | 8,3   | 8,3   | 8,3   |  |  |  |
| i              | 10,0  | 10,0  | 10,0  |  |  |  |
| k              | M50   | M50   | M50   |  |  |  |
| Leiter mm² min | 16    | 16    | 16    |  |  |  |
| Leiter mm² max | 50    | 50    | 50    |  |  |  |
|                |       |       |       |  |  |  |
|                |       |       |       |  |  |  |