


ML-E 045.11840.2 AOB/DALI


Monoline 045 | Recessed (1xLED 25W 840/4000K 3740lm)

— C0/C180 cd / 1000 lm - - - C90/C270

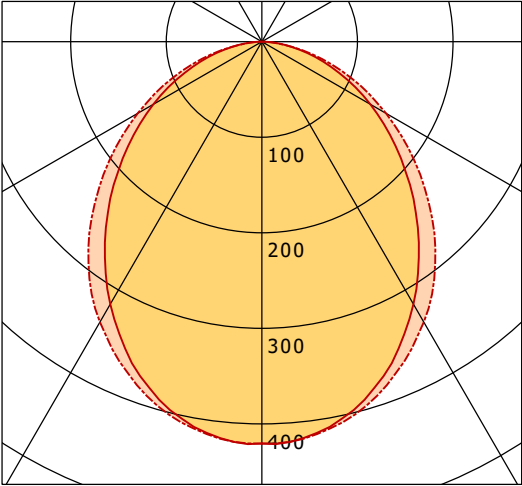

	C0	C90	C180	C270
0°	421	421	421	421
15°	394	399	394	399
30°	317	339	317	339
45°	222	250	222	250
60°	131	150	131	150
75°	54	60	54	60
90°	1	0	1	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

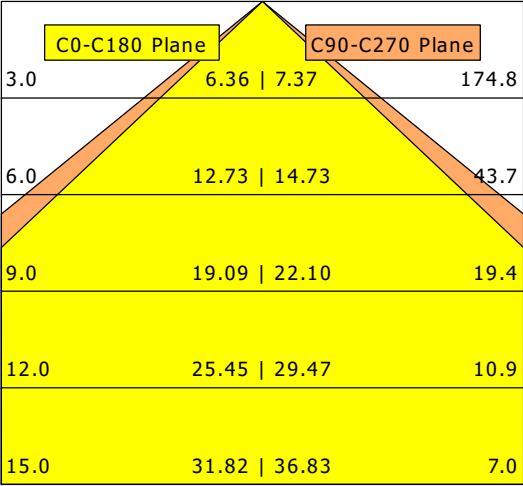

η		LED
Efficiency		150 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		25 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		26.7
UGR C90/C270		26.9
CIE Flux Codes		52 82 96 100 100
Ra/CRI		> 80