


TIML-PA 105.1139.830/DALI

Timba Linear | Pendant (1xLED 50W 830/3000K 5690lm)

— C0/C180 cd / 1000 lm - - - C90/C270

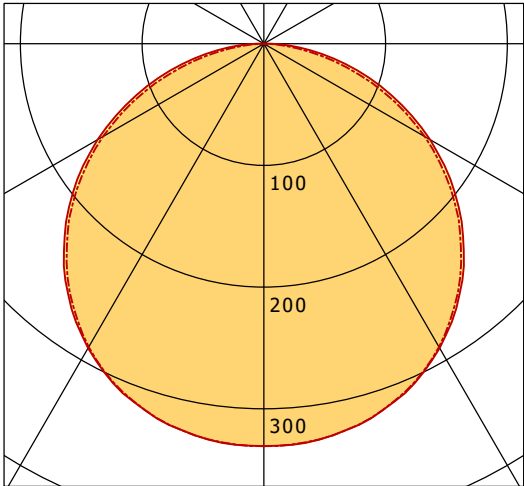

	C0	C90	C180	C270
0°	331	331	331	331
15°	322	321	322	321
30°	289	288	289	288
45°	232	229	232	229
60°	158	153	158	153
75°	75	66	75	66
90°	6	0	6	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	9.80 9.48	209.1	
6.0	19.59 18.96	52.3	
9.0	29.39 28.44	23.2	
12.0	39.18 37.92	13.1	
15.0	48.98 47.40	8.4	

η		LED
Efficiency		114 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		50 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		27.2
UGR C90/C270		27.4
CIE Flux Codes		46 77 95 100 100
Ra/CRI		> 80