


DWI-C 102.1240.830/ORGR

Dwide | Ecke (1xLED 21W 830/3000K 2880lm)

— C0/C180 cd / 1000 lm - - - C90/C270

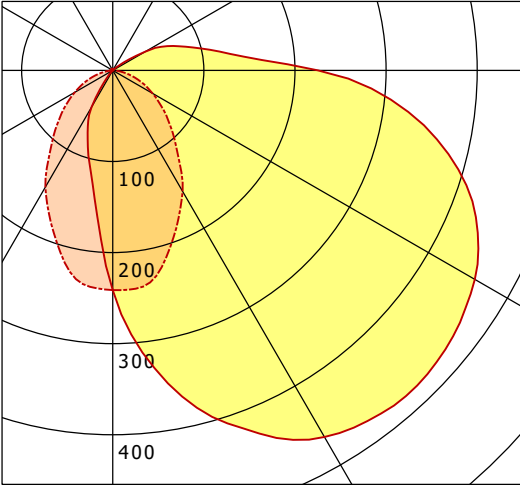

	C0	C90	C180	C270
0°	241	241	241	241
15°	389	218	101	213
30°	465	153	46	148
45°	481	91	0	88
60°	459	50	1	48
75°	387	20	3	18
90°	225	1	3	1
cd / 1000 lm				

LDC unsuitable for cone representation.
Asymetric LDC.

η Efficiency	LED 137 lm/W
Direct/Indirect	↓ 91% / ↑ 9%
System Power	21 W
UGR Reflection factors	X=4H, Y=8H 70/50/20
UGR C0/C180	33.7
UGR C90/C270	19.5
CIE Flux Codes Ra/CRI	37 66 87 91 100 >80