



# VTRM 12.0527.25

Vale-Tu Round Medium (1xLED 12W 827/2700K 1020lm)

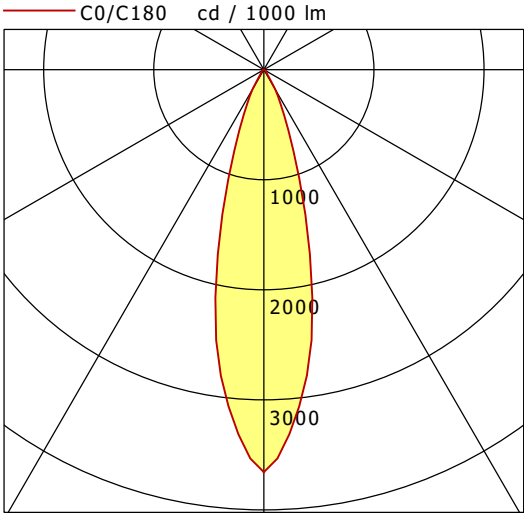

|              | C0   | C90  | C180 | C270 |
|--------------|------|------|------|------|
| 0°           | 3657 | 3657 | 3657 | 3657 |
| 15°          | 1545 | 1545 | 1545 | 1545 |
| 30°          | 207  | 207  | 207  | 207  |
| 45°          | 30   | 30   | 30   | 30   |
| 60°          | 15   | 15   | 15   | 15   |
| 75°          | 0    | 0    | 0    | 0    |
| 90°          | 0    | 0    | 0    | 0    |
| cd / 1000 lm |      |      |      |      |

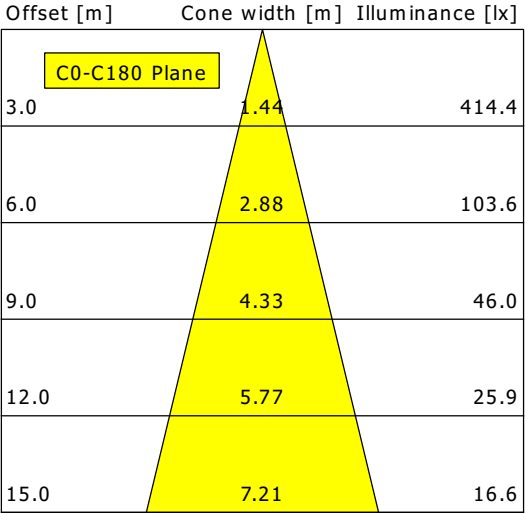

|                    |                   |               |
|--------------------|-------------------|---------------|
| <b>η</b>           |                   | LED           |
| Efficiency         |                   | 85 lm/W       |
| Direct/Indirect    |                   | ↓ 100% / ↑ 0% |
| System Power       |                   | 12 W          |
| <b>UGR</b>         |                   | X=4H, Y=8H    |
| Reflection factors |                   | 70/50/20      |
| UGR C0/C180        |                   | 18.3          |
| UGR C90/C270       |                   | 18.3          |
| CIE Flux Codes     | 95 99 100 100 100 |               |
| Ra/CRI             |                   | > 80          |