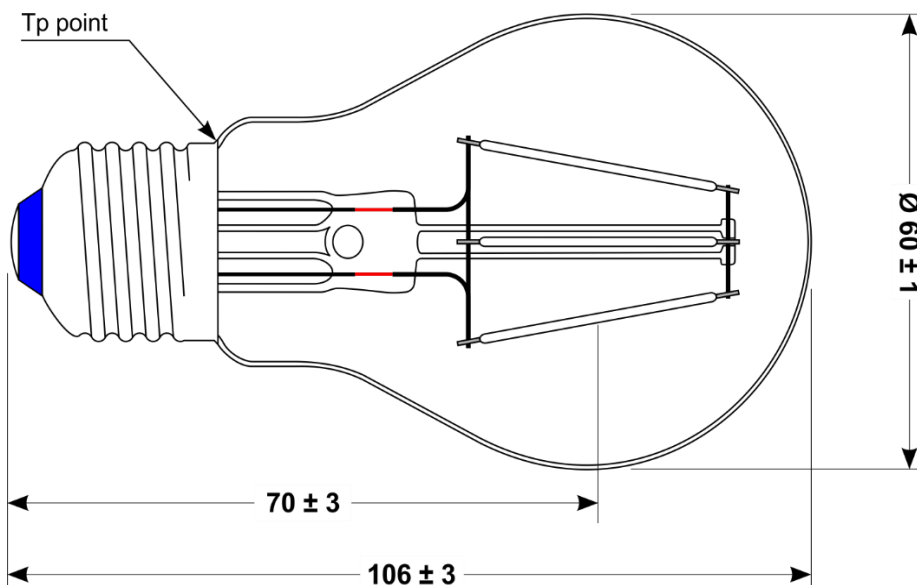


**MECHANICAL DATA:**Energy Class : **B**

Bulb type : A60

Finish : Clear

Cap type : E27

Light Colour : Blue

ELECTRICAL DATA:

		RATED	MIN.	MAX.
Lamp Wattage	(W) :	4.0	-	4.6
Lamp Voltage	(V) :	230	220	240
Lamp Current	(mA) :	35		
Power Factor	(λ) :	0.5	0.45	-
Supply Frequency	(Hz) :	50		
Energy Consumption per 1000h	(kW/h) :	4.0		

PHOTOMETRIC DATA:

Useful Luminous Flux	(lm) :	80	72	-
Useful Luminous Efficacy	(lm/W) :	20		
Correlated Colour Temperature	(K) :	-		
Dominant Wavelength	(nm) :	455	-	-
Spectral Purity	(%) :	99		
Chromaticity Co-ordinates	(x,y) :	CCx=0.150 CCy=0.030	6-step MacAdam Ellipse	

OPERATING CONDITIONS:

Ta Ambient temperature range	(°C) :	25	N/A	45
Tp Point	(°C) :	40	-	60
Starting Time	(s) :	-	-	<0.5
Warm-up Time to >95% Flux	(s) :	-	-	<1.0
Burning Position	:	Universal		
External Control Gear type	:	None		

LAMP LIFE:

Average Life (L ₅₀ F ₅₀)	(h) :	15,000
Switching Cycles	(#) :	100,000

APPLICATION: Decorative lighting. IP68 sealed except cap. Suitable for use outdoors in ≥IP44 holders. Not suitable for use with dimmer switches / electronic timers / electronic switches. Complies with IEC62560, IEC62612, IEC62471, IEC61547, IEC61000, EN55015, EN62493.

Issued by : TIENEN

Revision date : 19-VII-2021



DATA SHEET

Specification No. : 70-A-0086308/C




Page : 1 of 2




PHOTOMETRIC GRAPHICS:

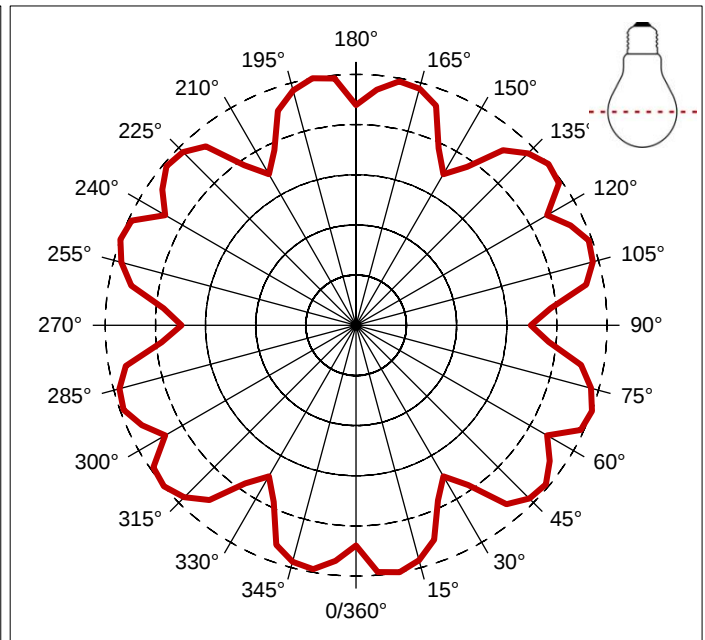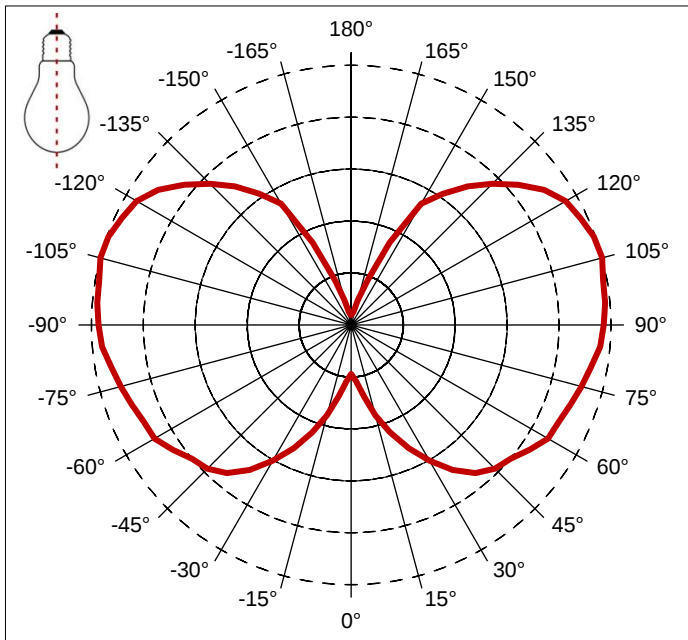

SPECTRAL GRAPHICS:

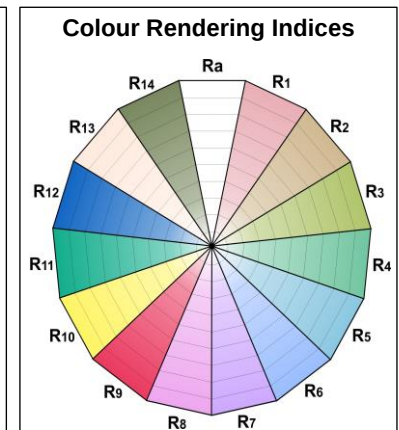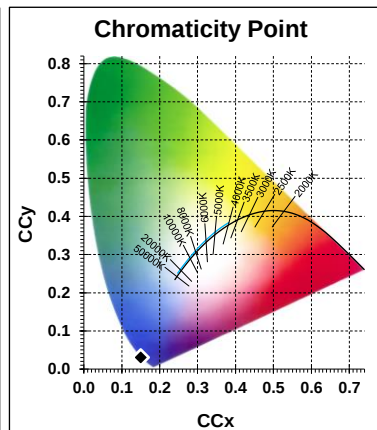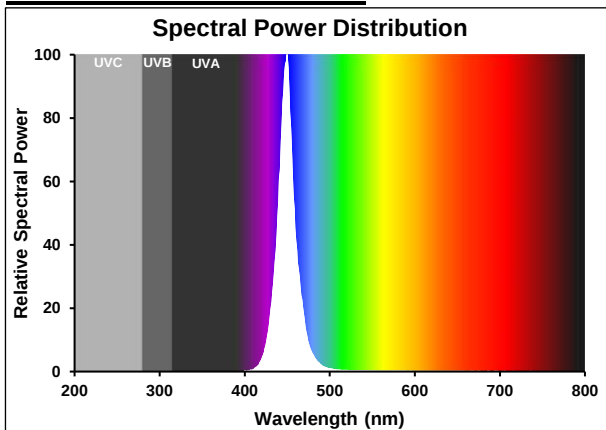

PERFORMANCE GRAPHICS:

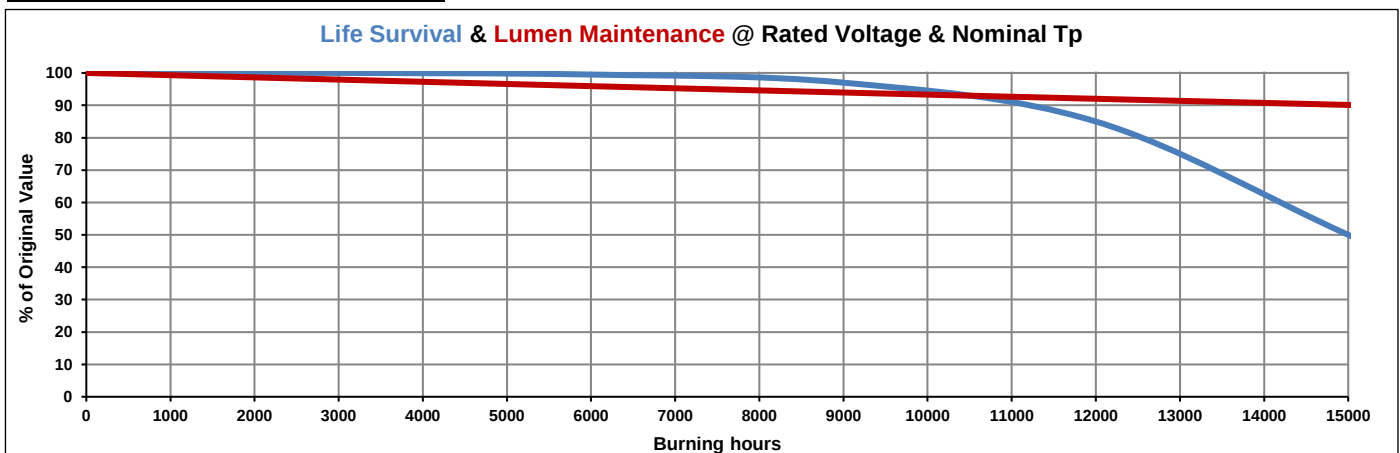

Issued by : TIENEN

Revision date : 19-VII-2021

DATA SHEET

Specification No. : 70-A-0086308/C

Page : 2 of 2