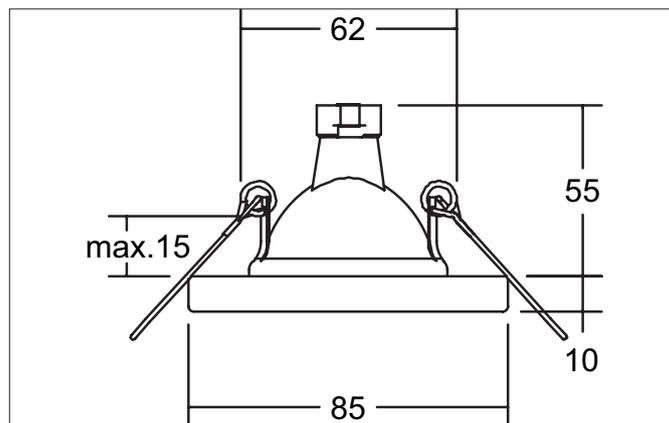



**SYDEL Recessed downlight, IP65, MR16**

Article no. 2264.22


**Tender**

Recessed downlight, IP65, MR16, stainless steel matt, Round. In a compact design, for installation in tool-less rapid assembly systems. Lamp holder: GX5.3, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Stainless steel / Glass, Degree of protection: according to DIN EN 60529 IP65, Protection class: (EN 61140) III, Voltage: 12V, Power: 13 W, Amount of light sources / fittings: 1 piece, Light colour: white, Adjustability: Not adjustable, without control gear, Dimmable: Depending on type of control gear, Type of dimming: Depending on driver.

**Product Benefits**

- Einbaudownlight in Schutzart IP65 (bei Einbau in geschlossenen Decken).
- Abdeckung per Bajonett befestigt (Edelstahlring mit Glas mattiert).
- Inklusive Dichtung zwischen Leuchteneinbauring und Decke, sowie zwischen Abdeckung und Einbauring.


**SYDEL Recessed downlight, IP65, MR16**

Article no. 2264.22

Article data	
Article no.	2264.22
GTIN	4250047728566
Series name	SYDEL
Short description	Recessed downlight, IP65, MR16
Material	Stainless steel / Glass
Colour	stainless steel matt
Type of surface	Matt
Shape	Round
Outer diameter	86 mm
Built-in diameter	62 mm
Installation depth	55 mm
Hight	10 mm
Weight	0.097 kg
D licence plate	No
Conformance	CE, UKCA

Operating technology of the luminaire	
System output	13 W
Voltage type	AC/DC
AC nominal voltage max	12 V
Frequency max	50 Hz
Lamp	For LED-retrofill lamp
Lamp holder	GX5.3
Protection class	III
Protection class on the ceiling side	IP20
Degree of protection	IP65
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	Yes
Energy efficiency class	not required

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	15 mm
Further references	No mounting box No cover with thermal insulation material
Material cover	Glass, satinised

Packing data	
Gross weight	0.118 kg
Length of packaging	85 mm
Packaging width	43 mm
Packaging hight	84 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.